

Wearable Low-Profile Antenna having Artificial Magnetic Conductor for Body Analysis

Ahmad Kamal

Department of Electrical Engineering, National University of Science and Technology (NUST), Islamabad, Pakistan

Abstract— In this project a design of low-profile wearable antenna is simulated on CST software. This proposed design is an analysis of CPW fed monopole with AMC (Artificial Magnetic Conductor) working as a ground. The design is made-up using different layers of Pellon Fabric mainly as textile material. This material is vastly used in different scientific, medical and industrial fields. In my proposed design of AMC antenna, it enhances the gain value up to little extent. The results from CST shows that the working of AMC antenna is good in all structural aspects like in the bending and crumping form. It also works efficiently if placed on any part of human body. Also, the numerical analysis shows that by adding AMC, the Specific Absorption Rate (SAR) values can be reduced in some conditions. For doing body analysis, three various models of body having different compositions & shapes were used.

Index Terms— Metamaterials, wearable antennas, textile antennas, Specific Absorption rate (SAR).

I. INTRODUCTION

In Today's world, wearable electronic systems [1-6] are playing an important role. Their demand has been increased due to the potential of applications in the vast fields like health-care monitoring [7-13], medical care, patient & different animal tracing, and rescue & relief operations. The significant part of these wearable technology are antennas. These antennas play a vital part in the wireless communication [14-17]. The main purpose of using wearable antennas is that they can work in the proximity of human body [18-24]. The design procedure of flexible antenna (which can be built on the elastic surfaces) is relatively different compared to the design of outdated antennas.

The electromagnetic coupling [25-28] is also one of the important factors that must be examined because it can impact the antenna's performance like the frequency & radiation loss because of lossy material (i.e. in the case of human body). Also, electromagnetic radiation is not beneficial for the human body as the absorbed radiations may pose dangerous health risks [10, 11, 22, 28, 29]. Especially for those circumstance in which these radiations are long term. So, in making wearable antennas, health and safety procedure comes at the first place. The radiations that emits from the antennas must have least absorbed power per mass unit which can be calculated by SAR [30-34]. Furthermore, to make the antenna wearable and for improving the comfort factor, they should be elastic and conformal to human body. To build such kinds of antennas, Textile materials are now widely being used because of less weight and flexible in nature [35, 36]. One of the disadvantages of building antenna using textile material is that the fabrication tolerances are

comparatively large as compared to such antennas which are build on PCB sheet etc. At last, the durability of the wearable antenna against several kinds of physical distortions such as bending, and wrinkling should be certain [37-40]. Having all these issues in mind, it turns out to be hard task to make an efficient wearable antenna with good reliable performance.

In some journals, the authors have designed numerous kinds of elastic antennas that can be wearable. It was suggested by many of the researchers that electromagnetic band gap (EBG) [32, 41-43] and artificial magnetic conductor (AMC) antennas [32, 44-47] can help in lessening the electromagnetic radiations to absorb in human bodies. The suggested design of textile antenna covers major bandwidth due to which it is less subtle to the low frequency. Frequency detuning could take place as a result of abnormality in structures [9, 39, 48-52]. Also, the proposed design of antenna composed of immensely little size which provides a good gain.

We have implemented a low-profile monopole antenna build on the textile structure attached with an AMC for providing the wearable properties. This antenna is designed for ISM band of 5.8 GHz. In this artical, only CST based simulations result are visualized. Measurements were carried out initially to predict the antenna's performance. Numerical analysis was performed using the CST software in which we have calculated results of single monopole & AMC components.

II. ANTENNA DESIGN

The proposed design of antenna contains coplanar waveguide (CPW) fed monopole antenna. The dimensions of designed monopole antenna are $27 \times 34 \text{ mm}^2$. This monopole antenna is positioned above on the AMC layer having 4×6 units. The complete dimensions of AMC units are $102 \times 68 \text{ mm}^2$. These two structures are designed on 1.8 mm substrate of Pellon Fabric having loss tangent and relative permittivity of 0.008 and 1.08 respectively.

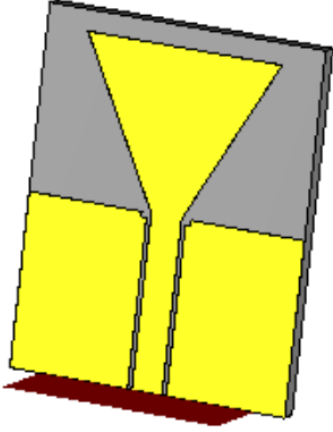


Figure 1: Coplanar Waveguide fed monopole

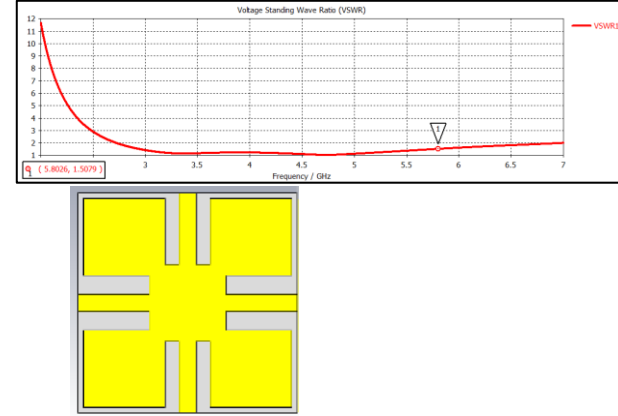


Figure 2: AMC Design

We have used a thick pure copper material from CST library having 0.08 mm thickness is used to create the conductive layers. The proposed conductivity of this material should be 2.5×10^5 S/m. Dimension of our antennas design is one single time until a high gain and good impedance matching can be attained in 5.8 GHz ISM frequency band.

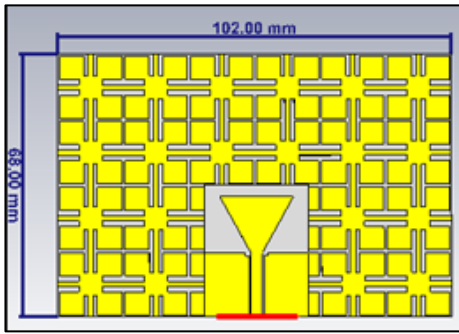


Figure 3: CPW fed Monopole with AMC arrays

III. Simulation Results and Discussion

S (1,1) reflection coefficient of the designed antenna is measured in free space (without placing it on any material). At first, we have computed the result of CPW fed monopole antenna and afterwards with the array of AMC layer.

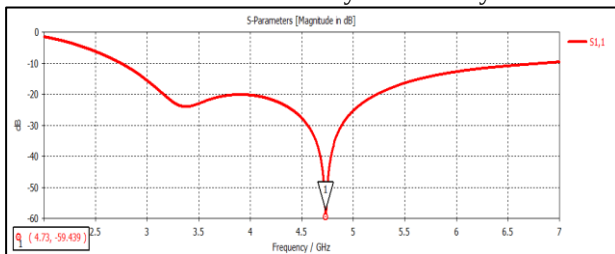


Figure 4: S (1,1) parameter of Monopole Antenna

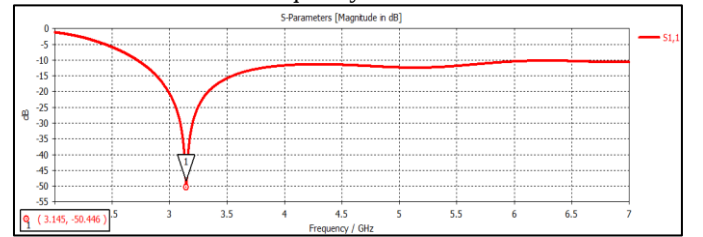


Figure 5: S (1,1) parameter of Monopole Antenna with AMC

By including the AMC layer, the change in the resonant frequency is observed, the frequency is shifted from right to left.

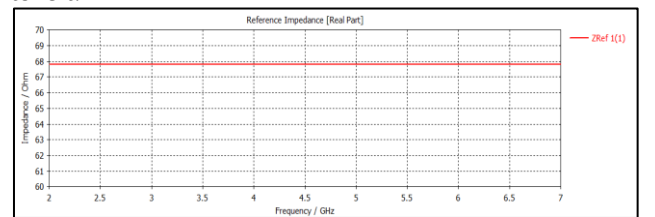


Figure 6: Ref. Impedance of Monopole antenna

Figure 7 VSWR of Monopole Antenna

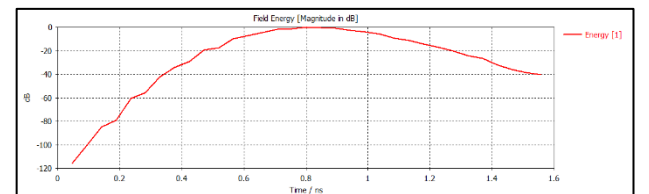


Figure 8: Field Energy for Monopole Antenna

By changing dimensions of both AMC unit cell and monopole antenna, the impedance matching and radiation properties that we want can be figured out by using the ISM 5.8 GHz band. By increasing the array of AMC by one column and row, the gain can be increased up to some limit.

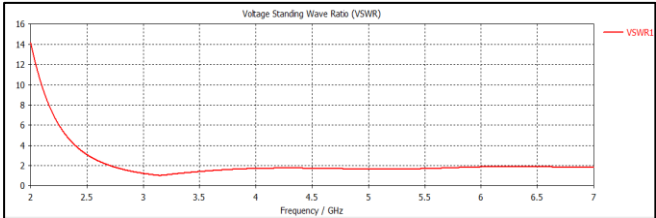


Figure 11 Gain of Monopole with AMC

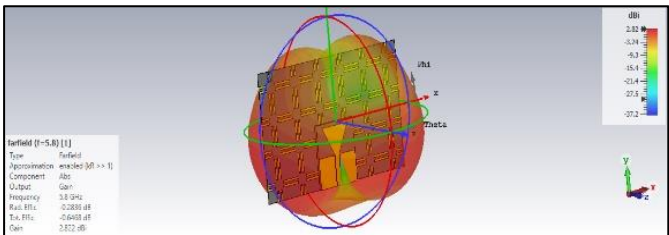


Figure 9: E-Field of Monopole antenna

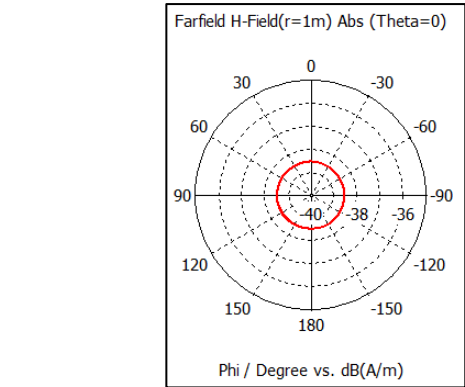
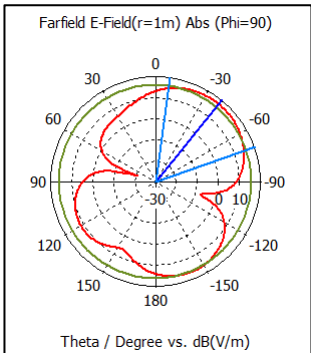


Figure 10: H field of Monopole Antenna

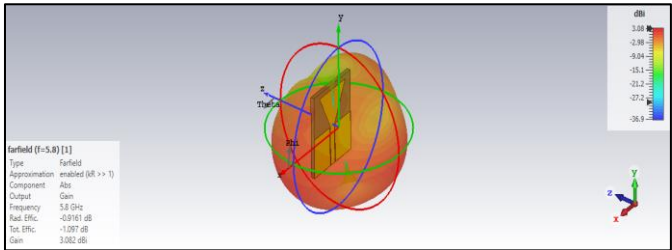


Figure 9 Gain of Monopole Antenna

In the result and analysis of monopole antenna we have faced many difficulties. The properties of material (Pellon Fabric), changing of dimension are one of the major sources for inaccurate data. Thickness in pellon fabric is not constant throughout.

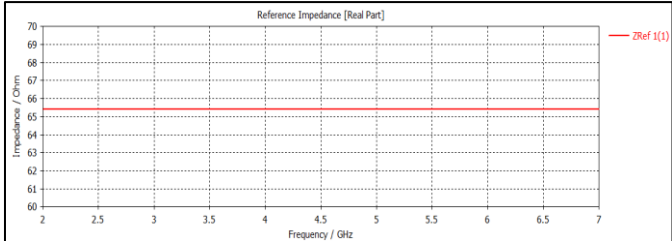


Figure 10 Ref Impdace of monopole with AMC

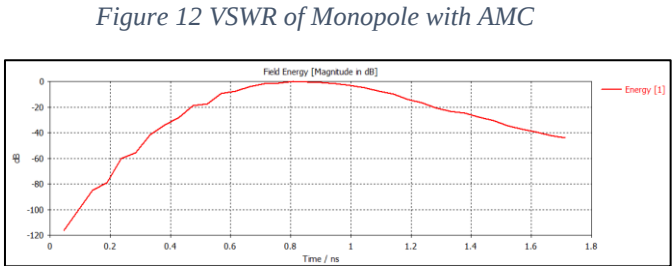


Figure 12 VSWR of Monopole with AMC

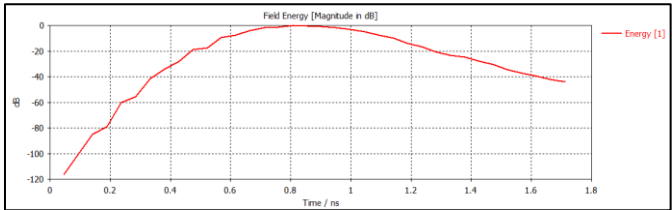


Figure 13 Field Energy for Monopole Antenna

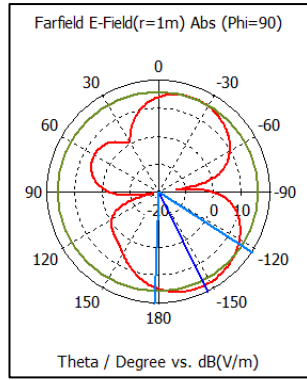


Figure 14 E-Field of Monopole with AMC

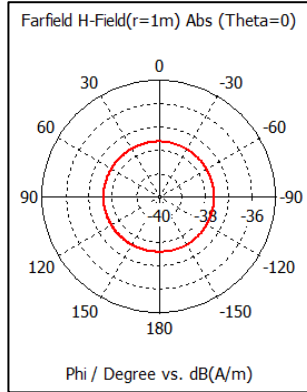


Figure 15 H- field of Monopole with AMC

The far-field radiation patterns of E-plane and H-plane were observed in the CST simulation. The far field radiation patterns measured in E & H plane also gain values matches closely with results simulated in CST for both antennas. The CPW fed monopole antenna holds a shape of pattern similar to dipole in E-plane and a uni-directional pattern in H plane. In both these patterns, the observed radiation patterns are below 20dB. By adding the array of AMC component, it will be resulted into quasi-hemispherical pattern of radiation. The gain that is measured for monopole with AMC antenna is 2.822 dBi and 3.082 dBi for the monopole antenna.

IV. Antenna Performance in Planar Configuration

The antenna's performance of monopole and monopole with AMC antennas in body and on free space will be discussed in this section. For monopole antenna, similar kinds of loading effect will be occurred when different models specific to human body are analyzed. These effects will shift the higher frequency towards the lower frequencies. The higher frequency mainly occurs high constant values of dielectric of different tissues that are specified in the human body models.

V. Conclusion

In this paper, we have designed a sustainable AMC antenna on the textile material for applications (mostly wearable). The design process was simulated in the CST software. In

the free-space, the AMC antenna displayed a bandwidth of 3.32 GHz – 4.73 GHz having a gain of 2.82 dBi. On CST, we have observed Simulations and different experimental analysis which have given detailed information about the design of AMC antenna. The results of AMC antenna show that it is powerful regarding resonance frequency. It shows that slight deviations may occur due to structural changes like bending and creasing. Also, the addition of the AMC reflector significantly decreases the back radiation and SAR values, which makes the AMC antenna design extra efficient as compared to single monopole antenna.

VI. Reference

- [1] H. R. Khaleel, "Design and fabrication of compact inkjet printed antennas for integration within flexible and wearable electronics," *IEEE transactions on components, packaging and manufacturing technology*, vol. 4, no. 10, pp. 1722-1728, 2014.
- [2] J. Matthews and G. Pettitt, "Development of flexible, wearable antennas," in *2009 3rd European Conference on Antennas and Propagation*, 2009: IEEE, pp. 273-277.
- [3] Y. Massoud and J. White, "FastMag: a 3-D magnetostatic inductance extraction program for structures with permeable materials," in *Proceedings of the 2002 IEEE/ACM international conference on Computer-aided design*, 2002, pp. 478-484.
- [4] A. Nieuwoudt, M. Mondal, and Y. Massoud, "Predicting the performance and reliability of carbon nanotube bundles for on-chip interconnect," in *2007 Asia and South Pacific Design Automation Conference*, 2007: IEEE, pp. 708-713.
- [5] J. Laska *et al.*, "Random sampling for analog-to-information conversion of wideband signals," in *2006 IEEE Dallas/CAS Workshop on Design, Applications, Integration and Software*, 2006: IEEE, pp. 119-122.
- [6] A. Nieuwoudt and Y. Massoud, "Multi-level approach for integrated spiral inductor optimization," in *Proceedings of the 42nd annual Design Automation Conference*, 2005, pp. 648-651.
- [7] B. W. An *et al.*, "Smart sensor systems for wearable electronic devices," *Polymers*, vol. 9, no. 8, p. 303, 2017.
- [8] Y. Massoud and J. White, "Improving the generality of the fictitious magnetic charge approach to computing inductances in the presence of permeable materials," in *Proceedings of the 39th annual Design Automation Conference*, 2002, pp. 552-555.
- [9] S. Kirolos, Y. Massoud, and Y. Ismail, "Power-supply-variation-aware timing analysis of synchronous systems," in *2008 IEEE International Symposium on Circuits and Systems*, 2008: IEEE, pp. 2418-2421.

- [10] Y. Massoud, J. Kawa, D. MacMillen, and J. White, "Modeling and analysis of differential signaling for minimizing inductive cross-talk," in *Proceedings of the 38th annual Design Automation Conference*, 2001, pp. 804-809.
- [11] A. Nieuwoudt and Y. Massoud, "On the optimal design, performance, and reliability of future carbon nanotube-based interconnect solutions," *IEEE transactions on electron devices*, vol. 55, no. 8, pp. 2097-2110, 2008.
- [12] L. S. Gao *et al.*, "On-the-spot lung cancer differential diagnosis by label-free, molecular vibrational imaging and knowledge-based classification," *Journal of biomedical optics*, vol. 16, no. 9, p. 096004, 2011.
- [13] Y. I. Ismail and E. G. Friedman, *On-chip inductance in high speed integrated circuits*. Springer Science & Business Media, 2001.
- [14] U. Chakraborty, S. Chatterjee, S. K. Chowdhury, and P. P. Sarkar, "A compact microstrip patch antenna for wireless communication," *Progress In Electromagnetics Research C*, vol. 18, pp. 211-220, 2011.
- [15] Y. Massoud and J. White, "Simulation and modeling of the effect of substrate conductivity on coupling inductance and circuit crosstalk," *IEEE Transactions on Very Large Scale Integration (VLSI) Systems*, vol. 10, no. 3, pp. 286-291, 2002.
- [16] A. Nieuwoudt and Y. Massoud, "RC circuit model for multi-walled carbon nanotubes," in *2007 7th IEEE Conference on Nanotechnology (IEEE NANO)*, 2007: IEEE, pp. 660-663.
- [17] T. Ragheb, A. Nieuwoudt, and Y. Massoud, "Efficient modeling of integrated narrow-band low noise amplifiers for design space exploration," in *Proceedings of the 16th ACM Great Lakes symposium on VLSI*, 2006, pp. 187-191.
- [18] P. Salonen, Y. Rahmat-Samii, and M. Kivikoski, "Wearable antennas in the vicinity of human body," in *IEEE Antennas and Propagation Society Symposium, 2004.*, 2004, vol. 1: IEEE, pp. 467-470.
- [19] S. Kirolos *et al.*, "Analog-to-information conversion via random demodulation," in *2006 IEEE Dallas/CAS Workshop on Design, Applications, Integration and Software*, 2006: IEEE, pp. 71-74.
- [20] Y. Massoud, S. Majors, T. Bustami, and J. White, "Layout techniques for minimizing on-chip interconnect self inductance," in *Proceedings of the 35th annual Design Automation Conference*, 1998, pp. 566-571.
- [21] T. Ragheb and Y. Massoud, "On the modeling of resistance in graphene nanoribbon (GNR) for future interconnect applications," in *2008 IEEE/ACM International Conference on Computer-Aided Design*, 2008: IEEE, pp. 593-597.
- [22] M. Mondal and Y. Massoud, "Reducing pessimism in RLC delay estimation using an accurate analytical frequency dependent model for inductance," in *ICCAD-2005. IEEE/ACM International Conference on Computer-Aided Design, 2005.*, 2005: IEEE, pp. 691-696.
- [23] S. Pfetsch *et al.*, "On the feasibility of hardware implementation of sub-Nyquist random-sampling based analog-to-information conversion," in *2008 IEEE International Symposium on Circuits and Systems*, 2008: IEEE, pp. 1480-1483.
- [24] T. Ragheb *et al.*, "Implementation models for analog-to-information conversion via random sampling," in *2007 50th Midwest Symposium on Circuits and Systems*, 2007: IEEE, pp. 325-328.
- [25] P. de Maagt, R. Gonzalo, Y. C. Vardaxoglou, and J.-M. Baracco, "Electromagnetic bandgap antennas and components for microwave and (sub) millimeter wave applications," *IEEE Transactions on Antennas and Propagation*, vol. 51, no. 10, pp. 2667-2677, 2003.
- [26] S. Kirolos and Y. Massoud, "Adaptive SRAM design for dynamic voltage scaling VLSI systems," in *2007 50th Midwest Symposium on Circuits and Systems*, 2007: IEEE, pp. 1297-1300.
- [27] A. Nieuwoudt and Y. Massoud, "Understanding the impact of inductance in carbon nanotube bundles for VLSI interconnect using scalable modeling techniques," *IEEE Transactions on Nanotechnology*, vol. 5, no. 6, pp. 758-765, 2006.
- [28] T. Ragheb, J. N. Laska, H. Nejati, S. Kirolos, R. G. Baraniuk, and Y. Massoud, "A prototype hardware for random demodulation based compressive analog-to-digital conversion," in *2008 51st Midwest Symposium on Circuits and Systems*, 2008: IEEE, pp. 37-40.
- [29] S. Il Kwak, D.-U. Sim, J. H. Kwon, and Y. J. Yoon, "Design of PIFA with metamaterials for body-SAR reduction in wearable applications," *IEEE transactions on electromagnetic compatibility*, vol. 59, no. 1, pp. 297-300, 2016.
- [30] J. Trajkovikj and A. K. Skrivervik, "Diminishing SAR for wearable UHF antennas," *IEEE Antennas and Wireless Propagation Letters*, vol. 14, pp. 1530-1533, 2014.
- [31] U. Ali *et al.*, "Design and SAR analysis of wearable antenna on various parts of human body, using conventional and artificial ground planes," *Journal of Electrical Engineering and Technology*, vol. 12, no. 1, pp. 317-328, 2017.
- [32] A. Hosseini, T. Ragheb, and Y. Massoud, "A fault-aware dynamic routing algorithm for on-chip networks," in *2008 IEEE International Symposium on Circuits and Systems*, 2008: IEEE, pp. 2653-2656.
- [33] Y. Massoud and A. Nieuwoudt, "Accurate resistance modeling for carbon nanotube bundles in VLSI interconnect," in *2006 Sixth IEEE Conference on Nanotechnology*, 2006, vol. 1: IEEE, pp. 288-291.
- [34] A. Nieuwoudt and Y. Massoud, "Performance implications of inductive effects for carbon-nanotube bundle interconnect," *IEEE electron device letters*, vol. 28, no. 4, pp. 305-307, 2007.

- [35] R. Salvado, C. Loss, R. Gonçalves, and P. Pinho, "Textile materials for the design of wearable antennas: A survey," *Sensors*, vol. 12, no. 11, pp. 15841-15857, 2012.
- [36] N. Rais, P. J. Soh, F. Malek, S. Ahmad, N. Hashim, and P. Hall, "A review of wearable antenna," in *2009 Loughborough antennas & propagation conference*, 2009: IEEE, pp. 225-228.
- [37] S. Yan, P. J. Soh, and G. A. Vandenbosch, "Wearable dual-band magneto-electric dipole antenna for WBAN/WLAN applications," *IEEE Transactions on Antennas and Propagation*, vol. 63, no. 9, pp. 4165-4169, 2015.
- [38] Y. Massoud, S. Majors, J. Kawa, T. Bustami, D. MacMillen, and J. White, "Managing on-chip inductive effects," *IEEE Transactions on Very Large Scale Integration (VLSI) Systems*, vol. 10, no. 6, pp. 789-798, 2002.
- [39] A. Nieuwoudt and Y. Massoud, "Assessing the implications of process variations on future carbon nanotube bundle interconnect solutions," in *8th International Symposium on Quality Electronic Design (ISQED'07)*, 2007: IEEE, pp. 119-126.
- [40] T. Ragheb, A. Nieuwoudt, and Y. Massoud, "Modeling of 3.1-10.6 GHz CMOS filter-based low noise amplifier for ultra-wideband receivers," in *2006 IEEE Annual Wireless and Microwave Technology Conference*, 2006: IEEE, pp. 1-5.
- [41] S. Zhu and R. Langley, "Dual-band wearable antennas over EBG substrate," *Electronics Letters*, vol. 43, no. 3, p. 1, 2007.
- [42] A. Y. Ashyap *et al.*, "Compact and low-profile textile EBG-based antenna for wearable medical applications," *IEEE Antennas and Wireless Propagation Letters*, vol. 16, pp. 2550-2553, 2017.
- [43] S. Kirolos, T. Ragheb, J. Laska, M. F. Duarte, Y. Massoud, and R. G. Baraniuk, "Practical issues in implementing analog-to-information converters," in *2006 6th International Workshop on System on Chip for Real Time Applications*, 2006: IEEE, pp. 141-146.
- [44] S. Genovesi, F. Costa, F. Fanciulli, and A. Monorchio, "Wearable inkjet-printed wideband antenna by using miniaturized AMC for sub-GHz applications," *IEEE Antennas and Wireless Propagation Letters*, vol. 15, pp. 1927-1930, 2016.
- [45] M. Mondal *et al.*, "Thermally robust clocking schemes for 3D integrated circuits," in *2007 Design, Automation & Test in Europe Conference & Exhibition*, 2007: IEEE, pp. 1-6.
- [46] H. Nejati, T. Ragheb, A. Nieuwoudt, and Y. Massoud, "Modeling and design of ultrawideband low noise amplifiers with generalized impedance matching networks," in *2007 IEEE International Symposium on Circuits and Systems*, 2007: IEEE, pp. 2622-2625.
- [47] A. Nieuwoudt and Y. Massoud, "Variability-aware multilevel integrated spiral inductor synthesis," *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems*, vol. 25, no. 12, pp. 2613-2625, 2006.
- [48] A. S. Alqadami, N. Nguyen-Trong, B. Mohammed, A. E. Stancombe, M. T. Heitzmann, and A. Abbosh, "Compact unidirectional conformal antenna based on flexible high-permittivity custom-made substrate for wearable wideband electromagnetic head imaging system," *IEEE Transactions on Antennas and Propagation*, vol. 68, no. 1, pp. 183-194, 2019.
- [49] Y. Massoud, A. Nieuwoudt, and T. Ragheb, "Automated design solutions for fully integrated narrow-band low noise amplifiers," in *2006 6th International Workshop on System on Chip for Real Time Applications*, 2006: IEEE, pp. 109-114.
- [50] A. Nieuwoudt and Y. Massoud, "Efficient modeling of substrate eddy currents for integrated spiral inductor design automation," in *48th Midwest Symposium on Circuits and Systems*, 2005., 2005: IEEE, pp. 1823-1826.
- [51] A. Nieuwoudt and Y. Massoud, "Optimizing the design of tunable spiral inductors for on-chip wireless applications," in *2006 IEEE Annual Wireless and Microwave Technology Conference*, 2006: IEEE, pp. 1-5.
- [52] J. N. Laska, S. Kirolos, M. F. Duarte, T. S. Ragheb, R. G. Baraniuk, and Y. Massoud, "Theory and implementation of an analog-to-information converter using random demodulation," in *2007 IEEE International Symposium on Circuits and Systems*, 2007: IEEE, pp. 1959-1962.