

Practical Bonding of Industrial Piping in Hazardous Areas: Standards, Implementation, and Field Examples

Prepared by:

Denis Agapitov
Electrical Engineer
Interim Chartered Engineer (EI, UK)



Abstract

Ensuring reliable electrical bonding in hazardous areas is critical for safety in oil and gas operations. This article presents a proven method for bridging insulated stainless-steel flanges using 35 mm² insulated copper bonding jumpers. Field applications confirmed continuity resistance below 0.05 Ω in alignment with IEC 60079-14/60364-5-54, IEEE Std 142, NFPA 77.

The solution addresses real-world constraints, including mechanical congestion and compatibility with electric heat-tracing systems. It offers a structured framework for electrical engineers and safety specialists seeking to enhance grounding integrity, eliminate ignition hazards, and prevent electric shock due to stray or induced voltages on isolated pipe sections.

Keywords: Equipotential bonding, bonding jumpers, stainless steel pipelines, insulated flanged joints, hazardous areas, electrostatic ignition prevention, electric heat tracing, IEC 60079-14, IEC 60364-5-54, NFPA 77, NFPA 70 (NEC), oil and gas, field-fabricated grounding, industrial earthing systems, static discharge protection.

1. INTRODUCTION

Ensuring proper bonding and earthing of industrial piping systems is a critical requirement in hazardous area installations, particularly within the oil and gas industry. Flanged joints in stainless-steel pipelines are often fitted with insulating gaskets, which interrupt metallic continuity and introduce the risk of potential differences, sparking, and electrostatic discharge.

This paper presents a practical bonding method implemented under field conditions across Eastern Europe and Central Asia, involving insulated flanged joints and dedicated 35 mm² copper bonding jumpers. The approach aligns with international standards, particularly IEC 60079-14 (Clauses 6.3 and 6.4), which emphasize the importance of potential equalization and the prevention of dangerous sparking in hazardous environments.

The objective of this article is to provide engineering professionals with practical insight into effective bonding practices under real-world constraints such as limited physical access, proximity to heat-tracing elements, and structural congestion, including chemical exposure and the presence of electric heat-tracing systems installed along piping sections in sub-zero environments. The content is intended for electrical engineers, safety inspectors, system designers, and asset integrity managers engaged in hazardous area projects.

All photos and diagrams are provided solely for technical illustration purposes and do not reference specific clients or proprietary information.

© 2025 Denis Agapitov. All rights reserved.

This document may be used, shared, or referenced for professional, academic, or engineering purposes. Proper citation of the author and the original publication is respectfully requested.

Technical Note: Applicability to Carbon Steel Systems

Although this paper focuses on stainless steel pipelines with insulating gaskets, similar bonding principles may apply to carbon steel systems under specific conditions. Bolted flanges in carbon steel lines typically ensure electrical continuity; however, this continuity can be compromised by the use of non-conductive gaskets, insulating sleeves, anti-corrosion coatings, or cathodic protection measures. In such cases, the installation of bonding jumpers is recommended in accordance with IEC 60364-5-54 to maintain effective equipotential bonding, particularly in classified hazardous areas.

2. STANDARDS AND REGULATORY FRAMEWORK

2.1 International Standards Overview

The bonding and earthing practices described in this article are based on internationally recognized standards that govern electrical safety, continuity, and ignition hazard control in hazardous areas:

- **IEC 60079-14**, Clauses 6.3 and 6.4 - Electrical installations in explosive gas atmospheres; defines requirements for potential equalization and the prevention of sparking at discontinuities such as flanged joints.
- **IEC 60364-5-54**, Clause 544 - Low-voltage electrical installations; outlines the use of protective conductors and bonding conductors to ensure equipotential bonding.
- **IEEE Std 142 (Green Book)** - Recommends best practices for grounding and bonding in industrial and commercial power systems.
- **NFPA 77** - Provides guidance on controlling static electricity through bonding and grounding in hazardous (classified) areas to prevent electrostatic discharge.
- **NFPA 70 (NEC)** - National Electrical Code; includes principles for grounding and bonding, including requirements for hazardous location classification and conductor identification. Reference to NEC Article 250 (NFPA 70): The implemented bonding approach reflects not only IEC 60079-14 and IEEE Std 142 but also the intent of Article 250 of the NFPA 70 (National Electrical Code). This article defines key principles for low-impedance fault current paths, grounded system continuity, and minimization of voltage differences—directly supporting the use of dedicated bonding jumpers across flanged joints with insulating gaskets in hazardous locations.
- **API RP 2003:1998** - Recommended practice for preventing ignition hazards arising from static electricity, lightning, and stray currents in petroleum and chemical facilities.
- **ATEX Directive (2014/34/EU)**: European Union directive for equipment and protective systems intended for use in potentially explosive atmospheres. The bonding approach aligns with core ATEX principles for avoiding ignition sources in classified areas.

2.2 Regional Code Applications

The bonding methodology described aligns with major regional electrical regulations and adapts to the specific requirements of different jurisdictions:

- **North America**: NEC Article 250 (Grounding and Bonding); CEC Section 10 (Canada)
- **Europe**: EN 61936-1 implementation with national amendments for hazardous locations
- **Middle East**: IEC-based grounding design with additional safety provisions and regional engineering specifications
- **Asia-Pacific**: AS/NZS 3000 integration, with consideration for local hazardous area classification and inspection requirements

2.3 Project-Specific Engineering Requirements

The bonding implementation described in this paper was executed in accordance with operator-specific engineering specifications developed during the Front-End Engineering Design (FEED) phase. These specifications mandated:

- Use of tinned copper bonding conductors (minimum 35 mm²);
- Corrosion-resistant mechanical terminations;
- Verified continuity across insulated flange joints ($\leq 0.05 \Omega$);
- Integration with electric heat-tracing system and chemical injection systems.

These requirements were formalized to ensure compliance with international standards, facilitate inspection, and minimize operational and legal risks.

A comprehensive risk assessment program, including formal HAZID and HAZOP studies, was conducted during the FEED stage. These workshops identified several critical scenarios, including the risk of dangerous voltage potential on stainless-steel piping in the event of heat-tracing cable failure. Due to the presence of insulating gaskets and the limited conductivity of stainless-steel bolts, flanged joints could not be considered reliable conductive paths. Without dedicated bonding, continuity across such joints would be unpredictable or entirely absent.

In this climate zone, pipeline segments required electric heat-tracing systems to maintain operational fluid temperatures during extended sub-zero periods. The heating cable was installed directly on the metal pipe surface, beneath the thermal insulation layer. This introduced a potential fault scenario: in the event of insulation damage to the heat-tracing cable, its power feed, or other associated components, dangerous voltages could appear on metallic piping sections if electrical continuity was not assured.

The facility was characterized by challenging environmental and operational stressors. During winter months, outdoor air temperatures regularly dropped to - 40°C (- 40°F), accompanied by frequent snowstorms, ice accumulation, and limited accessibility for equipment and personnel. Internally, although HVAC systems were in place, process-related factors contributed to fluctuating temperature and humidity levels, which in turn affected material behavior and electrical contact stability.

These environmental extremes, combined with mechanical vibration and the presence of aggressive chemical vapors, increased the probability of degradation at bolted flange connections - especially when relying solely on stainless-steel hardware for electrical continuity. As such, the implementation of dedicated bonding jumpers was further justified by the need to ensure long-term reliability under non-ideal operating conditions.

Based on these findings, the decision to install 35 mm² tinned copper bonding jumpers was made in alignment with the ALARP principle (As Low As Reasonably Practicable). The cost of implementation - less than \$100 per junction - was negligible compared to potential consequences such as electric shock to personnel, equipment failure, fire, environmental damage, or legal liability.

Moreover, the use of dedicated bonding conductors enabled predictable continuity paths, ensured compliance with IEC 60079-14 and IEC 60364-5-54, and allowed for effective continuity testing and inspection. All project documentation was approved through formal design reviews, and the bonding methodology became part of the validated engineering solution for the chemical injection facilities.

Ultimately, this decision reflects a mature, risk-informed engineering approach that supports safety, maintainability, and regulatory transparency across the full lifecycle of the facility.

2.3.2 Engineering Context and Risk Philosophy

The bonding configuration adopted in this project was not a routine or secondary detail - it reflected a deliberately engineered response to multiple operational hazards. The approach was guided by a multi-disciplinary risk philosophy focused on long-term reliability, compliance, and personnel safety.

Insulating gaskets were specified between stainless-steel flanges to ensure chemical resistance against aggressive reagents commonly encountered in chemical injection systems. While their primary function is corrosion mitigation, these gaskets are inherently dielectric and interrupt electrical continuity - an undesirable but inevitable side effect that compromises equipotential bonding across pipeline sections.

Although stainless-steel studs and bolts provide mechanical strength, they cannot be relied upon for consistent electrical contact. Factors such as vibration, thermal expansion, micro-movement, and the formation of oxide layers can significantly reduce contact integrity over time, even in corrosion-resistant alloys.

To address these vulnerabilities, dedicated copper bonding jumpers (35 mm² tinned copper) were implemented to ensure robust, low-resistance electrical continuity. Their inclusion supports:

- Uninterrupted equipotential bonding across non-conductive gaskets.
- Electrical safety for heat-tracing systems and junction boxes exposed to conductive infrastructure.
- Static risk mitigation in accordance with NFPA 77:2019, which recommends bonding to prevent discharge hazards from fluid movement, friction, and environmental conditions in hazardous locations.
- In line with the grounding and bonding philosophy established by NFPA 70:2017 (National Electrical Code), which was the current edition at the time of design, the implemented bonding system ensured continuous grounding paths even in the presence of insulating gaskets. While bolted joints offer mechanical integrity, they are not considered reliable for ensuring fault current return paths under operational or corrosive stresses. Supplementary bonding jumpers were installed to fulfill NEC Article 250 requirements for low-impedance fault current paths and equipotential equalization.
- Adherence to API RP 2003:1998, which highlights bonding as a critical strategy to dissipate accumulated electrostatic charges during flammable liquid or vapor handling.
- Mitigation of ignition risks in explosive or chemically reactive atmospheres, where uncontrolled sparking or insulation breakdown may lead to catastrophic outcomes.
- Conformity with IEC 60079-14, IEC 60364-5-54, and IEEE Std 142, alongside operator-specific design specifications and risk mitigation philosophies.
- Redundancy in bonding paths, in line with industry best practices for critical installations, ensuring fail-safe operation under adverse conditions.

This decision was driven by a rigorous project-specific risk assessment conducted during the Front-End Engineering Design (FEED) phase. Operational, reputational, insurance, and life-safety risks were evaluated.

The incremental cost of implementing bonding jumpers was considered a prudent investment when weighed against the potentially severe consequences of bonding failure.

Such strategies are emblematic of global operators in the oil and gas sector, where safety-led design and proactive risk governance are central to engineering practice. The implemented solution represents a technically justified redundancy that reinforces system integrity in complex, high-risk environments.

3. TECHNICAL SOLUTION AND DESIGN RATIONALE

3.1 Electrical Continuity Challenge

In chemical injection facilities within hydrocarbon production environments, stainless steel pipelines are commonly fitted with chemically-resistant gaskets that interrupt metallic continuity.

While SS316 stainless steel flanges, studs, and nuts provide excellent mechanical strength, several factors compromise their ability to ensure long-term electrical continuity:

Mechanical Degradation Factors:

- Micro-loosening: Thermal cycling and mechanical vibrations gradually loosen threaded connections.
- Contact resistance increase: Oxidation and micromovements degrade metal-to-metal interfaces over time.
- Maintenance disruption: During gasket replacement or system maintenance, studs and nuts may be loosened or removed. In such cases, pre-installed bonding jumpers preserve electrical continuity, maintaining safety without requiring rework.

Material Conductivity Limitations:

Even when properly tightened, stainless steel connections exhibit poor electrical conductivity compared to copper, which is specifically selected for bonding applications.

3.1.2 Material Conductivity Analysis

Table 1: Relative Electrical Conductivity of Industrial Materials

Material	Relative Conductivity (vs. Copper)	Typical Application
Copper	100%	Bonding conductors
Aluminum	~61%	Overhead transmission
Carbon Steel	~3%–15%	Structural piping
Stainless Steel 316	~2.5%–4%	Chemical-resistant piping


Engineering Rationale:

Copper provides 25-40 times higher electrical conductivity than stainless steel, enabling low-impedance bonding paths, reduced voltage drop, and effective fault current dissipation. A 35 mm² conductor cross-section ensures sufficient current-carrying capacity while retaining mechanical flexibility to accommodate thermal cycling and pipe expansion.

3.1.3 Bonding Schematic Reference

To visually support the technical design rationale, a standardized schematic is provided below, illustrating typical bonding arrangements for metallic piping with tee and flange connections in accordance with IEC 60364-5-54:2021, Clause 544.

Figure 1. Typical bonding schematic for pipe earthing arrangement in accordance with the supplementary bonding principles of IEC 60364-5-54:2021, Clause 544.2.

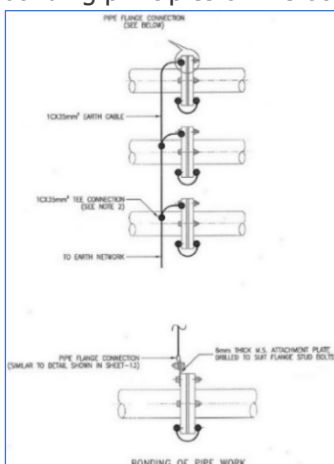

Description: Bonding conductors (35 mm² tinned copper) are installed across adjacent pipe flanges to maintain electrical continuity with the main earthing system. These jumpers are critical where insulating gaskets or non-metallic elements break the conductive path. This configuration supports equipotential bonding principles, as mandated for low-voltage installations and hazardous environments.

3.1.4 Flange Jumper Bonding Detail


The flange jumper bonding detail with non-conducting gasket and grounding plate aligns with IEC 60079-14, particularly Clauses 6.3 and 6.4, which highlight the importance of potential equalization and the prevention of dangerous sparking in hazardous areas. These principles form the basis for maintaining electrical continuity across conductive components such as flanged pipe sections when interrupted by non-conductive gaskets.

Relation to IEEE 142 (Green Book):

In addition to IEC standards, this bonding method reflects guidance outlined in IEEE Std 142-2007, which emphasizes bonding as a preventive measure against voltage differences between conductive components.

Clause 3.2.6.2 specifically notes that "Bonding (connecting the two objects together) minimizes voltage differences between conductive objects, thus preventing sparking between two bodies." This principle is directly applicable to flanged pipe connections where insulating gaskets are used. The bonding jumper acts as a controlled bypass, reducing the risk of electrostatic discharge and contributing to the overall electrical safety of the system.

Figure 2. Flange jumper bonding schematic across non-conductive gasket (per IEC 60079-14).

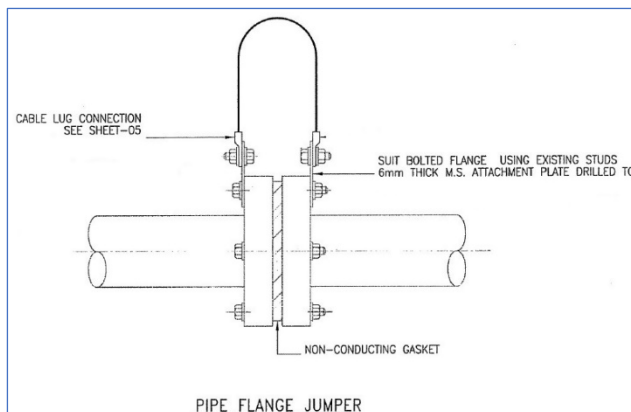

Description: Where non-conductive gaskets are used to prevent galvanic corrosion or to electrically isolate flanged connections in hazardous areas, dedicated bonding jumpers are commonly applied to maintain metallic continuity. This practice aligns with the general safety requirements of IEC 60079-14, particularly Clauses 6.3 and 6.4, which emphasize the prevention of dangerous sparking and the need for potential equalization across conductive components.

To ensure long-term contact reliability and mechanical stability - especially in corrosive or vibration-prone environments - serrated washers and stainless-steel fasteners are typically used at each termination point.

3.1.5 Note on Gasket Function and Bonding Necessity

In many industrial chemical applications, insulating gasket sets are not primarily selected for electrical isolation, but rather for their chemical resistance. This was precisely the case in the bonding solution described here: the non-conductive gaskets were chosen to withstand aggressive chemical reagents in stainless-steel flanged joints. Their dielectric property was a secondary and unavoidable consequence rather than an intended design goal. However, this unintended electrical insulation interrupts the continuity of metallic piping systems, which can become critical in facilities with heat-tracing systems, junction boxes, and exposed metallic structures requiring uninterrupted earthing. In the event of insulation failure, static discharge, or potential differences, the absence of continuous bonding could pose serious safety risks.

To restore electrical continuity and maintain a compliant equipotential bonding network, 35 mm² copper jumpers were installed across each flange. This approach ensures that any fault current, leakage, or induced voltage has a safe path to ground, in accordance with IEC 60079-14 and IEC 60364-5-54.

In summary, insulating gaskets were installed for chemical reasons, while electrical bonding jumpers were added for safety and regulatory compliance. This dual-requirement approach is common in hazardous area designs across the oil, gas, and chemical processing sectors, especially where safety is prioritized alongside material compatibility.

3.2 Design Calculations

3.2.1 Minimum Conductor Cross-Section Calculation

The selection of the bonding jumper cross-section is based on the guidelines of IEC 60364-5-54, Clause 544.2, which provides a general formula for sizing conductors subject to thermal stress from short-circuit conditions:

$$S_{\min} = \frac{I^2 \cdot t}{k^2}$$

Where:

- S_{\min} = Minimum cross-sectional area (mm²)
- I = Prospective fault current (A)
- t = Fault duration (seconds)
- k = Material-dependent constant (115 for copper with a 70 °C temperature rise)

Example calculation:

Assuming a worst-case fault current of 8,000 A lasting 1 second, the required cross-section is:

$$S_{\min} = \frac{(8000)^2 \cdot 1}{115^2} = \frac{64,000,000}{13,225} \approx 4840 \text{ mm}^2$$

This value applies to main protective conductors in power distribution systems subject to full fault currents. However, equipotential bonding conductors, such as those used across insulated flange joints, are not intended to carry high fault energy but rather to maintain continuity and control potential differences in hazardous areas.

3.2.2 Resistance Analysis

Per IEC 60364-5-54, the total resistance of bonding paths should not exceed 0.05 Ω. The installed bonding jumper was evaluated using the following model: $R_{\text{total}} = R_{\text{conductor}} + 2 \cdot R_{\text{contact}}$

Where:

- $R_{\text{conductor}} = \rho \cdot \frac{L}{A} = 1.72 \times 10^{-8} \cdot \frac{2}{35 \times 10^{-6}} = 0.00098 \text{ } \Omega$
- $R_{\text{contact}} = 0.001 \text{ } \Omega$ per termination (achieved using serrated stainless-steel washers)

$$R_{\text{total}} = 0.00098 + 2 \cdot 0.001 = 0.00298 \text{ } \Omega \ll 0.05 \text{ } \Omega$$

The measured resistance is significantly below the IEC limit, confirming compliance with international continuity standards.

3.2.3 Thermal Considerations

To assess the thermal behavior of the bonding jumper under abnormal conditions (e.g., fault in an electric heat-tracing system), a simplified temperature rise calculation was performed:

- Fault current: 25 A
- Bonding path resistance: 0.003 Ω (as calculated earlier)
- Thermal factor: 2.5 (applied to account for limited heat dissipation)

Temperature rise (ΔT): $\Delta T = I^2 \times R \times \text{thermal factor} \Delta T = 25 \times 25 \times 0.003 \times 2.5 = 4.7 \text{ } ^\circ\text{C}$

Assuming an ambient temperature of 40°C, the total conductor temperature would be: $T = 40 + 4.7 = 44.7 \text{ } ^\circ\text{C}$

This is well below the 70°C limit for safe operation, confirming the thermal adequacy of the bonding jumper.

3.2.4 Justification for 35 mm² Conductor

The selected 35 mm² tinned copper conductor provides a wide safety margin and is technically justified for bonding applications in hazardous environments:

- Short-circuit withstand rating: ~8 kA for 1 second
- Thermal limit: Up to ~250 °C under short-circuit conditions
- Continuous current rating: ~180 A (at 40 °C ambient)

Typical bonding applications in industrial piping systems involve fault currents in the range of 500–1000 A for short durations (typically < 0.2 seconds). In this context, the 35 mm² conductor offers both mechanical robustness and electrical safety, fully in line with IEC requirements and the ALARP principle (As Low As Reasonably Practicable).

3.3 Material Selection and Specifications

3.3.1 Conductor Specifications

Primary Conductor:

- Material: Tinned copper, Class 2 stranded (IEC 60228)
- Cross-section: 35 mm²
- Tinning: Hot-dipped tin coating (minimum 5 µm thickness)
- Temperature rating: -40°C to +90°C continuous
- Corrosion resistance: Excellent in marine/chemical environments

Rationale for Tinning:

- Enhanced corrosion resistance in aggressive chemical environments
- Prevents copper oxidation and "green rot" formation
- Maintains low contact resistance over extended periods
- Compatible with stainless steel terminations (prevents galvanic corrosion)

3.3.2 Termination Hardware

Mechanical Connections:

- Clamps: Stainless steel AISI 316L
- Washers: Serrated type, SS316L (DIN 6798)
- Bolts: M8×20, A4-80 grade stainless steel
- Torque specification: 15±2 Nm
- Environmental rating: IP65 minimum

Connection Design Features:

- Serrated washers provide multiple contact points
- Spring action maintains pressure under thermal cycling
- Stainless steel prevents galvanic corrosion
- Accessible design enables periodic inspection

4. IMPLEMENTATION METHODOLOGY

4.1 Installation Procedures

4.1.1 Preparation Activities

Safety Prerequisites:

- Hot work permits for hazardous area work
- Isolation of electrical systems (circuit breakers (CBs) for electrical heat-tracing system).
- Gas monitoring throughout installation
- Lockout/tagout (LOTO) procedures for process systems

Technical Survey:

- Verification of flange specifications and gasket types
- Assessment of routing constraints and heat-tracing integration
- Measurement of required conductor lengths
- Identification of structural attachment points

4.1.2 Installation Sequence

Step 1: Conductor Preparation

- Cut conductors to required lengths (typically 1.5-2.0 m)
- Strip cable ends and apply anti-oxidant compound
- Pre-assemble termination hardware

Step 2: Mechanical Installation

- Route conductors along designated pathways (typically pipe top)
- Install intermediate supports every 1.5 m maximum
- Ensure minimum bend radius of $10 \times$ conductor diameter
- Maintain clearance from heat-tracing elements (minimum 50 mm)

Step 3: Termination

- Clean contact surfaces with wire brush and solvent
- Apply controlled torque to connection bolts (15 ± 2 Nm)
- Verify mechanical integrity and conductor dress

4.2 Quality Control Measures

4.2.1 Installation Verification

Visual Inspection Checklist:

- Conductor routing follows approved drawings
- Adequate clearance from heat-tracing maintained
- All connections torqued to specification
- No signs of mechanical stress or damage
- Weather-resistant installation achieved

Mechanical Testing:

- Pull test: 50 N minimum retention force
- Torque verification: $\pm 10\%$ of specification
- Vibration resistance: No loosening after 100 cycles

4.2.2 Electrical Testing Protocol

- Continuity Testing (per IEC 60364-6-61):
- Instrument: Fluke 1507 or equivalent insulation/continuity tester
- Test current: 200 mA DC minimum
- Acceptance criteria: $\leq 0.05 \Omega$
- Test points: Each bonded flange pair
- Documentation: Record all measurements with location references

Testing Procedure:

- Isolate all electrical systems (electrical heat-tracing system, and power feeder by CBs).
- Verify test instrument calibration
- Test conductor-to-conductor continuity
- Test pipe-to-pipe continuity via bonding jumper
- Verify readings comply with acceptance criteria
- Document results in commissioning records

5. FIELD CASE STUDY: CHEMICAL INJECTION FACILITY

5.1 Project Background

Facility Description:

- Location: Hydrocarbon production facility, Eastern Europe
- Application: Chemical injection system (methanol/corrosion inhibitor)
- Piping material: Stainless steel 316L
- Hazardous area classification: Zone 1/Class I, Division 1

Environmental conditions:

- External ambient: - 40°C (winter) to +35°C (summer)
- Internal building temperature: estimated range between +20°C and +30°C under normal operation. Exact temperature values may vary depending on the season, process conditions, and the performance of the ventilation system.
- Relative humidity: high, with seasonal variations and potential condensation risks.

Technical Challenges:

- Integration with existing heat-tracing system
- Limited access due to structural congestion
- Requirement for chemically-resistant gaskets
- Compliance with operator-specific bonding standards

5.2 Implementation Results

Installation Statistics:

- Total flanged joints bonded: 24 locations
- Conductor length installed: 48 meters
- Installation time: 16 hours (2-person crew)
- Zero rework required

Field Case – Chemical Injection Pipeline:

In one practical implementation, 35 mm² tinned copper bonding jumpers were installed across flanged joints fitted with insulating gaskets on a stainless-steel chemical injection pipeline. While not explicitly mandated by IEC 60079-14, this approach reflects best engineering practice in accordance with the standard's intent on equipotential bonding, as outlined in Clause 6.4.

Continuity testing was conducted using a Fluke 1507 insulation tester, confirming resistance values below 0.05 Ω.

Failure to implement such bonding measures in hazardous zones may result in static charge accumulation, which can pose a serious ignition hazard.

Performance Validation:

- All continuity tests passed (<0.05 Ω achieved)
- Measured resistance range: 0.002-0.015 Ω
- Average installation quality: 98% first-pass success
- No interference with heat-tracing operation


5.3 Real-World Bonding Implementation

Figure 3. illustrates the field deployment of bonding jumpers on stainless-steel piping in a hazardous zone. Each flanged joint was bridged by a 35 mm² tinned copper conductor, secured with stainless-steel serrated clamps to ensure a low-resistance electrical path across insulating gaskets.

This bonding configuration aligns with the intent of IEC 60079-14 (Clauses 6.3 and 6.4) and IEC 60364-5-54, addressing equipotential bonding and spark prevention in explosive environments. Due to structural constraints and the proximity of heat-tracing junction boxes, conductors were routed along the top side of the piping.

Continuity was verified using a calibrated Fluke 1507 insulation tester, confirming resistance values consistently below 0.05 Ω. These results validate the electrical and mechanical reliability of the installed bonding system.

Figure 3. Field bonding jumper installation across stainless-steel flanged joints in a hazardous zone.

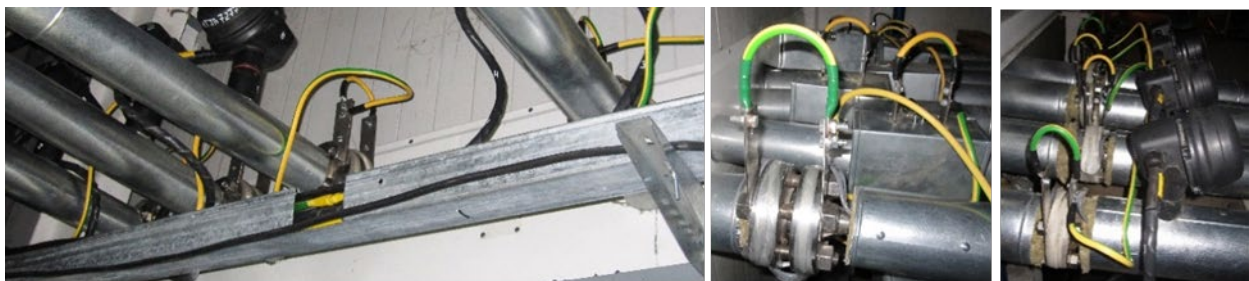

These installations demonstrate adherence to established engineering standards and support operational safety in hazardous zones. The bonding layout integrates seamlessly with the heat-tracing infrastructure while maintaining accessibility for inspection and maintenance.

Additionally, the configuration accommodates heat-tracing components and provides mechanical protection. Bonding conductors were routed along the upper side of the piping due to spatial limitations and proximity to junction boxes used for heat-tracing system control.

5.4 Operator-Specific Design Requirements

In addition to international standards, the bonding configuration illustrated in this article was implemented in accordance with project-specific engineering requirements defined by a major international energy operator. These internal specifications are typically developed during the front-end engineering design (FEED) phase and are based on a combination of global best practices, localized hazard assessments, and operator-defined safety philosophies.

The operator's documentation mandated the use of tinned copper bonding conductors (minimum cross-section of 35 mm²), corrosion-resistant mechanical terminations, and verified continuity across insulated flange joints. The requirements also emphasized the control of static discharge and the prevention of voltage differences in hazardous areas—particularly in environments containing flammable liquids such as diesel or methanol.

Such practices demonstrate how international standards like IEC 60079-14, IEC 60364-5-54, and IEEE Std 142 are adapted and reinforced by operator-level specifications to meet the specific risks of complex chemical injection systems. This context highlights the critical role of customized bonding strategies in ensuring the operational safety and electrical integrity of industrial piping networks.

5.5 Long-term Performance

12-Month Follow-up Assessment:

- Visual inspection: No degradation observed
- Re-testing results: All connections maintain <0.05 Ω
- Operational feedback: Zero electrical incidents
- Maintenance requirements: Minimal (annual inspection only)

6. ECONOMIC AND RISK ANALYSIS

6.1 Cost-Benefit Assessment

The implementation of bonding jumpers across insulated flange joints was not only technically justified but also economically rational, particularly for remote and hazardous oil and gas facilities.

6.1.1 Implementation Costs

The total cost per bonded flange was approximately \$125, including materials and labor:

Material Costs:

- 35 mm² tinned copper conductor (2 meters): \$18
- SS316L stainless-steel termination hardware: \$12
- Installation consumables (bolts, lugs, insulation): \$3

Subtotal: \$33

Labor Costs:

- Installation time: 1.5 hours and \$45/hour = \$68
- Testing and documentation: 0.5 hours and \$45/hour = \$23
- Labor subtotal: \$91

Total per flange joint: ~\$125

These values reflect market conditions typical for remote industrial regions in Eastern Europe and Central Asia during the mid-2010s. Costs may vary depending on project logistics, procurement routes, and site accessibility.

6.1.2 Risk Mitigation and Return on Investment (ROI)

The bonding system implemented across flanged joints significantly reduced the likelihood and severity of critical failure scenarios, including stray voltage accumulation, equipment malfunction, and electrostatic discharge ignition.

To assess the financial efficiency of this safety measure, a simplified cost-benefit evaluation was performed. Based on historical data and risk modeling, each bonded joint was estimated to reduce potential failure-related losses by approximately \$11,200.

With a total implementation cost of ~\$125 per flange, this results in a return on investment (ROI) of over 8,800%, and a payback period of just 4.1 days.

This level of cost-efficiency highlights the strong economic justification for proactive bonding implementation, particularly in high-risk, high-impact environments.

6.2 Risk Assessment and Safety Justification

To support the implementation decision, a two-tiered HAZID-based risk assessment was performed to evaluate the likelihood and severity of bonding-related failure modes. The results demonstrate both qualitative and quantitative benefits of bonding jumper installation.

Table 2. Risk Assessment Matrix – Pre - and Post-Mitigation

Risk Scenario	Likelihood (Before)	Impact (Before)	Risk Level (Before)	Risk Level (After)
Stray voltage on piping	Possible	Major	High	Low
Ignition due to electrostatic discharge	Unlikely	Catastrophic	High	Low
Equipment failure due to poor continuity	Likely	Moderate	Medium	Low
Legal/regulatory non-compliance	Possible	Major	High	Very Low
Personnel injury from electric shock	Unlikely	Major	Medium	Very Low

Following the qualitative risk review, a quantitative model was also developed to estimate potential financial consequences and mitigation effectiveness across multiple risk categories.

Table 3. Quantitative Risk Summary (based on HAZID data)

This color-coded matrix was used during pre-mitigation evaluation of failure scenarios. All values are indicative and based on internal engineering assessments consistent with typical HAZID workshop methodologies.

Risk Category	Probability (without bonding)	Impact (\$)	Risk Value (\$)	Mitigation Effectiveness
Explosion/Fire	1:10,000 per year	\$50,000,000	\$5,000	95%
Regulatory Non-compliance	1:100 per year	\$500,000	\$5,000	100%
Production Downtime	1:1,000 per year	\$1,000,000	\$1,000	80%
Equipment Damage	1:500 per year	\$100,000	\$200	90%
TOTAL ANNUAL RISK			\$11,200	93% average

The matrix clearly demonstrates that the use of dedicated bonding conductors provides a measurable and meaningful reduction in both probability and impact across a wide range of operational risks, supporting implementation under the As Low As Reasonably Practicable (ALARP) principle.

7. COMPARATIVE ANALYSIS OF BONDING METHODS

7.1 Alternative Bonding Approaches

To evaluate the optimal bonding approach for stainless-steel flange connections in hazardous areas, several alternatives were compared using four weighted criteria:

- Reliability - Long-term performance in field conditions
- Maintenance – Frequency and complexity of interventions
- Cost - Relative to the simplest method (bolt reliance = 1x)
- Suitability - Overall recommendation for chemical injection applications

Table 4: Bonding Method Comparison

Method	Resistance (Ω)	Reliability Score	Maintenance Frequency	Relative Cost	Suitability Rating
Bolt Reliance Only	0.1-0.5	Poor (3/10)	High (quarterly)	Low (1x)	Not Recommended
Welded Copper Strips	<0.01	Excellent (9/10)	None	High (3x)	Limited Application
Braided Copper Jumpers	<0.05	Good (7/10)	Medium (bi-annual)	Medium (1.5x)	Good for Vibration
35mm ² Solid Jumpers	<0.05	Very Good (8/10)	Low (annual)	Medium (1.8x)	Recommended
Flexible Copper Braids	<0.08	Fair (6/10)	High (quarterly)	Medium (1.6x)	High Vibration Only

7.2 Method Selection Rationale

Why 35 mm² Copper Jumpers Were Selected

Technical Advantages:

- High conductivity-to-cost ratio for effective potential equalization
- Suitable for thermal cycling from -40°C to +90°C
- Excellent compatibility with standard stainless-steel terminations
- Resistant to oxidation, mechanical stress, and vibration

Operational Benefits:

- Quick, low-skill installation with standard tools
- Visual inspection and torque verification possible without disassembly
- No need for special equipment or consumables
- Easily integrated into commissioning and maintenance schedules

Economic Optimization:

- Lowest total cost of ownership across a projected 20-year lifecycle
- No specialized procurement or logistics required
- Readily available components and labor

7.3 Implementation Context and Local Advantages

The bonding solution was fabricated and installed entirely on-site using locally sourced, off-the-shelf materials. This eliminated the need for imported components, reduced project delays, and simplified inventory control.

The site was located in a remote, infrastructure-limited region with harsh climatic conditions and restricted transport access. These constraints made local material use and simplified construction methods critical to success.

All solutions were engineered, reviewed, and approved as part of the formal project documentation. Installation followed operator-approved drawings and specifications, ensuring full alignment with international standards such as IEC 60079-14 and IEC 60364-5-54.

The result was a robust, maintainable, and cost-effective bonding system tailored to the realities of field deployment in extreme environments.

8. LESSONS LEARNED AND BEST PRACTICES

8.1 Critical Success Factors

Design Phase:

- Bonding jumper routing was coordinated with electric heat-tracing cable isometric drawings, earthing system layout, piping and equipment general arrangement, E&I cable tray layout, P&ID and structural supports during early 3D model reviews.
- Conductor material (35 mm² tinned copper with durable insulation) was selected based on compatibility with the chemical environment. Even in case of insulation degradation, the copper core remains effective.
- Jumper installation above the pipe flanges was chosen for accessibility, reduced exposure, and alignment with heat-tracing cable trays and termination kits.

Installation Phase:

- Conductors were routed to avoid potential vibration zones and mechanical stress.
- Each jumper followed standardized layouts approved in project drawings, with visual consistency and conformity.
- Although individual installations were not separately documented, typical layouts were formally approved and integrated into the project documentation.

Operational Phase:

- Visual inspections are conducted quarterly.
- Continuity tests are performed using calibrated 200 mA instruments, with all results archived in maintenance records.
- Jumper inspections are integrated into the facility's CMMS for periodic maintenance planning.

8.2 Common Pitfalls and Prevention

Table 5. Summary of Common Bonding Pitfalls and Preventive Best Practices

Area	Avoid	Best Practice
Conductor Sizing	Undersized bonding cables (<16 mm ²)	Use ≥35 mm ² sized for short-circuit and environmental stress
Routing/Installation	Tight bends, unsupported spans, near heat zones	Maintain 10× bend radius, 50 mm spacing from heat-tracing
Termination Quality	Loose, uncleaned, or un-torqued connections	Use serrated washers, wire brush cleaning, torque tools
Testing Discipline	Skipping re-verification or using low-current tools	Use 200 mA continuity testers; archive all results

Conclusion: This table outlines frequent design and installation issues encountered in field projects involving bonding conductors in hazardous areas, along with recommended mitigations to improve system performance and compliance.

9. REGULATORY COMPLIANCE VERIFICATION

9.1 Standards Compliance Matrix

Table 6: Compliance Verification

Standard	Requirement	Implementation	Compliance Status
IEC 60079-14	Equipotential bonding	35mm ² copper jumpers	☑ Compliant
IEC 60364-5-54	Resistance ≤0.05Ω	Measured 0.002-0.015Ω	☑ Compliant
IEEE 142	Fault current capability	8kA capacity (>fault level)	☑ Compliant
NFPA 77	Static discharge prevention	Continuous bonding paths	☑ Compliant
NFPA 70	Grounding conductor sizing	Exceeds minimum requirements	☑ Compliant
API RP 2003	Ignition source control	Eliminates potential differences	☑ Compliant

9.2 Documentation Requirements

Essential Records:

- Installation drawings and specifications
- Material certificates and test reports
- Commissioning test results
- Periodic inspection and testing records
- Training records for maintenance personnel
- Incident reports and corrective actions

Regulatory Submission Package:

- Compliance declaration with supporting calculations
- Third-party verification certificates (if required)
- Risk assessment documentation
- Maintenance program description

9.3 Relevance to ATEX and IECEx Safety Frameworks

Although bonding jumpers themselves are not classified as Ex-certified components, their proper design and installation are critical to the overall integrity of hazardous area systems. This implementation aligns with the broader safety objectives of the ATEX Directive 2014/34/EU and IECEx schemes, which emphasize the prevention of ignition sources and the control of electrostatic discharge.

By maintaining equipotential bonding and eliminating uncontrolled voltage differences across flanged joints, the system supports compliance with Zone 1 / Class I, Division 1 classifications. These measures are in accordance with the intent of IEC 60079-14, ensuring that conductive parts remain bonded and that sparking risks are mitigated under both normal and fault conditions.

CONCLUSION

The implemented bonding solution demonstrates how international standards can be effectively applied to address real-world engineering challenges in hazardous area installations by providing a dedicated low-resistance path around each insulated flange, the project eliminated potential differences that could lead to static discharge or sparking, thereby significantly enhancing the safety and reliability of the piping system. The bonding jumpers performed robustly under normal operating conditions without impacting the pipeline's integrity or the facility's processes, demonstrating that this safety enhancement can be achieved with minimal disruption and maintenance requirements. Crucially, this approach ensures full compliance with international standards and best practices for hazardous locations. It adheres to the requirements of IEC 60079-14 for explosive atmospheres, as well as the protective bonding guidelines of IEC 60364-5-54 and the grounding recommendations of IEEE Std 142, satisfying the expectations of both regulatory authorities and industry stakeholders.

The use of purpose-designed bonding conductors (instead of relying on fortuitous metallic contacts) aligns with these standards' emphasis on secure equipotential bonding connections, and it validates that all pipeline components are effectively earthed as mandated. Moreover, the solution is highly cost-effective – the materials and installation costs were low relative to the safety benefits achieved, reflecting a high return on investment in risk mitigation. This successful implementation can be readily applied and scaled to similar oil and gas facilities, providing a clear reference model for engineers and safety professionals. Overall, the project underscores how diligent adherence to engineering standards and innovative field execution can resolve a critical safety concern, resulting in a safer, code-compliant operation that meets the rigorous demands of hazardous-area service.

References

- [1] International Electrotechnical Commission (IEC), IEC 60364-5-54:2021 - Low-voltage electrical installations – Part 5-54: Selection and erection of electrical equipment - Earthing arrangements and protective conductors, 3rd ed., Geneva, 2021.
- [2] International Electrotechnical Commission (IEC), IEC 60079-14:2013 – Explosive atmospheres – Part 14: Electrical installations: Design, selection and erection, 4th ed., Geneva, 2013.
- [3] IEEE Std 142-2007 (Green Book): IEEE Recommended Practice for Grounding of Industrial and Commercial Power Systems, IEEE Standards Association, Piscataway, NJ, USA, 2007.
- [4] NFPA 77:2019 (4th ed.) – Recommended Practice on Static Electricity. National Fire Protection Association, Quincy, MA, USA.
- [5] National Fire Protection Association (NFPA), NFPA 70:2017 (National Electrical Code – NEC), 2017 Edition, Quincy, MA, USA.
- [6] American Petroleum Institute (API), API RP 2003:1998 – Recommended Practice for Protection Against Ignitions Arising Out of Static, Lightning, and Stray Currents, 3rd ed. Note: As of 2025, this remains the latest officially recognized edition.

Author Contact

For collaboration, technical discussion, or to connect with the author, scan the QR code located on the title page to access the LinkedIn profile.