

A Pull-down Dynamic Analysis of Two-Span Steel Frames Subjected to Progressive Collapse

Mohammadjavad Esfandiari¹ and Girum Urgessa²

¹*Department of Civil, Environmental and Infrastructure Engineering, George Mason University, Fairfax, VA, USA*

²*Department of Civil, Environmental and Infrastructure Engineering, George Mason University, Fairfax, VA, USA*

Progressive collapse, also known as disproportionate collapse, describes a chain reaction of structural element failures in which a primary structural element failure results in the failure of adjoining structural elements. It eventually causes widespread structural damages and a disproportionate collapse. While high level finite-element models incorporating non-linear dynamic analysis will produce more realistic results in progressive collapse scenarios, they are computationally time consuming. Therefore, the development of a non-linear time history pull-down model that is validated with experimental results would be beneficial for producing acceptable and efficient design solutions, particularly for practicing structural engineers. In this paper, a non-linear time history pull-down model of a two-span steel frame is analyzed in ETABS. The ETABS model results are compared with experimental results of two steel frames with two-spans conducted by the National Institute of Standards and Technology (NIST). The NIST experiments include beam-column assemblies from the second-floor framing system of a ten-story building and each span is 20 feet long. The numerical results from ETABS pull-down analysis showed good agreement with the results from the NIST experimental study.

Keywords: Progressive collapse, Pull-down analysis, Finite element model, Time- history, Disproportionate collapse.

1 Introduction

Progressive collapse is defined as a chain reaction of structural system failure initiated from a local failure of a structural member due to terrorist attacks, gas explosions, major earthquakes, or fires. Failure in a local structural element leads to an increase in internal forces and an overload in nearby structural elements, ultimately causing a progressive collapse of the entire or a disproportionately large part of the structure. The collapses of the Alfred P. Murrah Federal Building in 1995 in Oklahoma City, the Twin Towers of the World Trade Center in 2001 in New York City, and recently the Plasco Building in 2017 in Tehran, demonstrate the disruptive nature of progressive collapse. The consequences include economic losses and casualties of human lives. Even though it is impossible to predict the timing of natural or man-made causes that can lead to progressive collapse, structures can be designed to better withstand progressive collapse.

In recent years, particularly after the events of September 11, 2001, many studies consisting of experimental programs and numerical studies have been conducted on progressive collapse of structures. Furthermore, the General Services Administration (GSA) (GSA, 2003) and the Department of Defense (DoD) (Defense, 2005) have published guidelines aiming at reducing the potential for progressive collapse when designing new or renovated buildings. Byfield et al. (Byfield, Mudalige, Morison, & Stoddart, 2014), Wang et al. (Wang, Zhang, Li, & Yan, 2014) and Qian and Li (Qian Kai & Li Bing, 2015) have provided extensive reviews on this subject.

NIST (Sadek et al., 2011) generated two finite element models of structural frames in DYNA: a detailed model with a large number of elements, primarily solid and shell elements, and a reduced model with a limited number of elements, primarily beam and spring elements. DYNA accounts for both geometrical and material nonlinearities. The center stub column of the frame was pushed down under displacement control until failure occurs in both models. Moreover, an effective stress versus effective plastic strain curve was specified. For this purpose, the engineering stress-strain curve was converted to a true stress vs. plastic strain curve and several coupon tests were conducted for each steel type. Iterative finite element analyses of the tensile test were carried out, and the failure strain and the extrapolation of the true stress-strain curve were adjusted until quantitative agreement of the measured and calculated engineering stress-strain behavior in the softening region beyond the maximum stress was reached. An arrangement of spring elements was used to represent the behavior of diagonal braces in all models. The results of the numerical study were compared with the result from the experimental study and found to be in an excellent agreement (Sadek et al., 2011).

Kaewkulchai and Williamson (2004) created a beam-column element with multi-linearization and lumped plasticity. They studied the significance of dynamic load redistribution following the failure of one or more elements. They also created a simplified finite element model to assess the impact effect due to falling failed members on the remaining structure. Their

results indicated that dynamic redistribution of loads is a significant feature of the progressive collapse problem, which should be accounted for in order to avoid estimates of capacity that are not conservative (Kaewkulchai G. & Williamson E. B., 2006; Kaewkulchai & Williamson, 2004).

While general purpose finite element software programs, such as ABAQUS, DYNA, and ANSYS are utilized for understanding progressive collapse mechanism in a research setting, structural design and capacity checks per building codes are not performed in these programs due to the expertise needed to post-process and interpret results (Lallotra & Singhal, 2017). In fact, Hartmann et al. (Hartmann et al., 2008) showed that the computations associated with the simulation of collapses of real world structures based on conventional methods are very costly. Consequently, progressive collapse is rarely considered in conventional design limiting engineers to rely only on structural integrity considerations, such as providing standard rebar details for minimizing progressive collapse in reinforced concrete building. On the other hand, design-oriented software programs, such as ETABS and SAP2000, can handle large multi-story design projects at a much reduced time when compared to general purpose programs.

This research utilizes a design-oriented program for facilitating progressive collapse analysis for a wider structural engineering community in the design world. The model can offer engineers the capability to efficiently evaluate a wide range of column removal scenarios in new building designs. It can also aid to strengthen existing structures against progressive collapse through retrofitting techniques (Esfandiari, Bondarabadi, Sheikholarefin, & Manshadi, 2018; Urgessa & Esfandiari, 2018).

2 NIST Experimental Test Description

One of the most important large scale studies on progressive collapse was conducted by the National Institute of Standards and Technology (NIST) (Sadek et al., 2011). For this experimental study, two experimental models were built: one frame designed to meet the requirements of Seismic Design Category (SDC) C with welded unreinforced flange-bolted web (WUF-B) connections, and another frame satisfying the requirements of SDC D with reduced beam section (RBS) connections. These specimens were beam-column assemblies from the second-floor framing system derived from a ten-story building and each span measured 20 ft in length. For both the WUF-B and RBS test specimens, the beam-column assembly initially remained in the elastic range at small displacements of the center column at about 2 in (50 mm). In that early stage of the response, the behavior was shown to be dominated by flexure. With increasing the vertical displacement, yielding occurred at the beam-to-column connections, and axial tension developed in the beams, indicating catenary behavior. The axial tension in the beams increased until the connections could no longer sustain the combined bending and axial stresses, and the beam-column assemblies failed. NIST utilized these experimental results and developed computational models for determining reserve capacity and robustness of steel structures. The specification of one of the NIST test setups is shown in Figure 1.

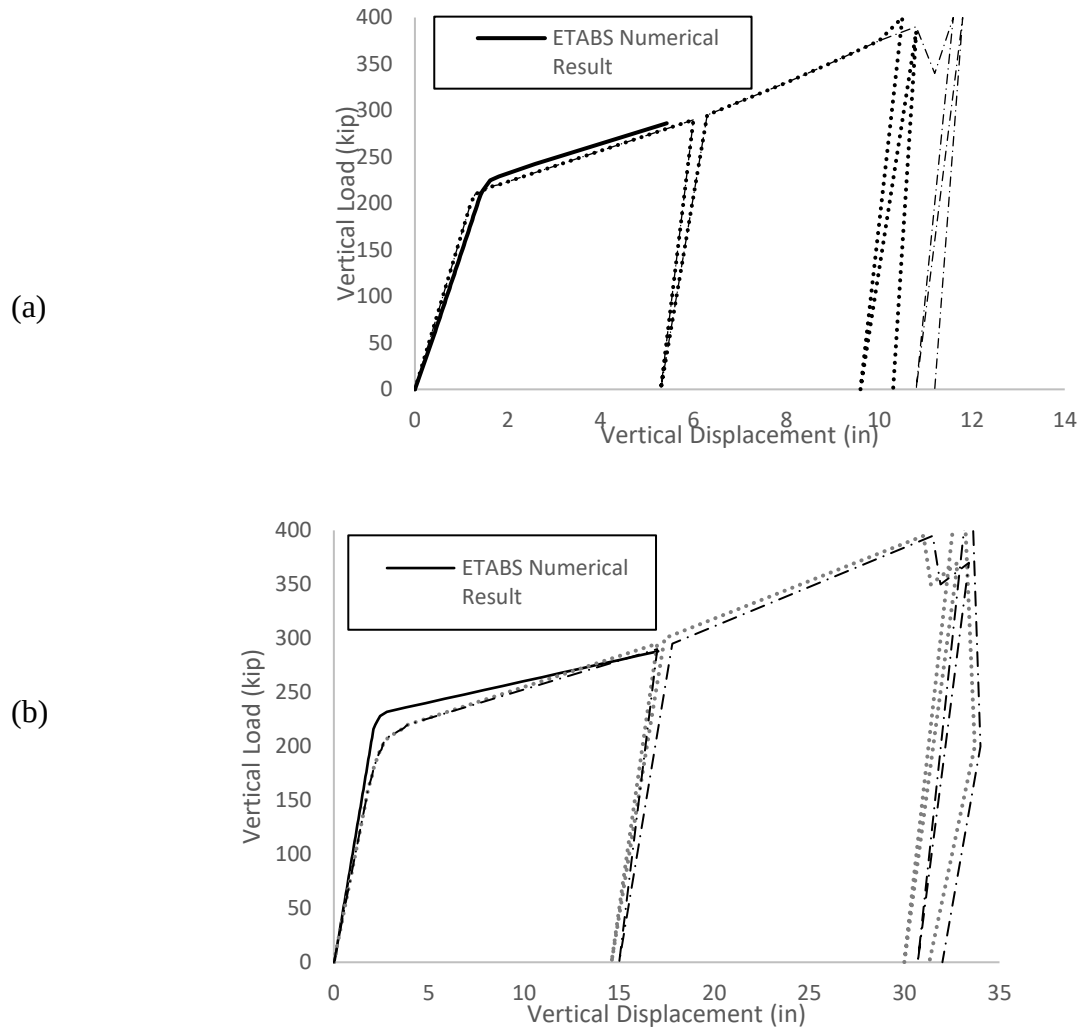


Figure 2. Applied vertical load versus vertical displacements at (a) 1/3 span of beams and (b) center column for the RBS specimen.

Figure 3 shows the comparison of the NIST experimental test with our ETABS numerical study as far as vertical displacement profiles of beams corresponding to vertical loads for the RBS specimen are concerned. As it can be seen, there is a good agreement between numerical and experimental results. The difference can be justified by the fact that connections are not explicitly modeled in ETABS and they are considered as fixed connections. The results are close enough that can be used for future studies on progressive collapse.

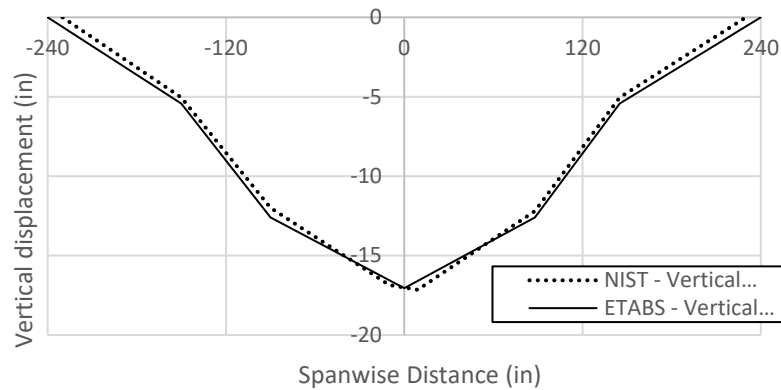


Figure 3. Vertical displacement profiles of beams corresponding to vertical loads for the RBS specimen at 286 kip.

Figures 2 and Figure 3 demonstrate that results from numerical studies using ETABS pull-down analysis are in good agreements with the NIST experimental studies.

4 Conclusions and Future Research

This paper presented a pull-down dynamic analysis of two-span steel frames subjected to progressive collapse. The accuracy of the proposed numerical study was verified using experimental results available in the literature. While the model proposed in this article facilitates progressive collapse analysis, it can be used for addressing practical issues such as combining it with optimization algorithms for developing an integrated computational framework that is capable of incorporating robust and fast progressive collapse analysis for designing new structures or retrofitting existing structures. The progress of our optimization algorithm is reported in (Esfandiari, Urgessa, Sheikholarefin, & Manshadi, 2018b, 2018a; Esfandiary, Sheikholarefin, Bondarabadi, & A, 2016) and our research is underway to integrate it with progressive collapse analysis of structural frames.

5 References

- Byfield, M. P., Mudalige, W., Morison, C., & Stoddart, E. (2014). A review of progressive collapse research and regulations. *Proceedings of the ICE - Structures and Buildings*, 167, 447–456.
- Mudalige, Wjesundara, Morison, C. and Stoddart, E. (2014) A review of progressive collapse research and regulations. *Proceedings of the ICE - Structures and Buildings*, 167 (8), 447-456.
- Defense, D. of. (2005). *Unified Facilities Criteria: Design of Buildings to Resist Progressive Collapse (UFC 4-023-03)*. Department of Defense Washington, DC, USA.

- Esfandiari, M. J., Rahimi Bondarabadi, H., Sheikholarefin, S., & Dehghan Manshadi, S. H. (2018). Numerical investigation of parameters influencing debonding of FRP sheets in shear-strengthened beams. *European Journal of Environmental and Civil Engineering*, 22(2), 246-266.
- Esfandiari, M. J., Urgessa, G. S., Sheikholarefin, S., & Manshadi, S. D. (2018). Optimization of reinforced concrete frames subjected to historical time-history loadings using DMPSO algorithm. *Structural and Multidisciplinary Optimization*, 1-16.
- Esfandiari, M. J., Urgessa, G. S., Sheikholarefin, S., & Manshadi, S. D. (2018). Optimum design of 3D reinforced concrete frames using DMPSO algorithm. *Advances in Engineering Software*, 115, 149-160.
- Esfandiari, M. J., Sheikholarefin, S., & Bondarabadi, H. R. (2016). A combination of particle swarm optimization and multi-criterion decision-making for optimum design of reinforced concrete frames. *International Journal of Optimization in Civil Engineering*, 6(2), 245-268.
- FEMA-365. (2000). Prestandard and Commentary for the Seismic Rehabilitation of Buildings | FEMA.gov. Retrieved August 14, 2018, from <https://www.fema.gov/media-library/assets/documents/757>
- GSA, U. (2003). Progressive collapse analysis and design guidelines for new federal office buildings and major modernization projects. *Washington, DC*.
- Hartmann, D., Breidt, M., Nguyen, van V., Stangenberg, F., Höhler, S., Schweizerhof, K., ... Liebscher, M. (2008). Structural collapse simulation under consideration of uncertainty – Fundamental concept and results. *Computers & Structures*, 86(21), 2064–2078. <https://doi.org/10.1016/j.compstruc.2008.03.004>
- Kaewkulchai, G., & Williamson, E. B. (2004). Beam element formulation and solution procedure for dynamic progressive collapse analysis. *Computers & Structures*, 82(7), 639–651. <https://doi.org/10.1016/j.compstruc.2003.12.001>
- Kaewkulchai G., & Williamson E. B. (2006). Modeling the Impact of Failed Members for Progressive Collapse Analysis of Frame Structures. *Journal of Performance of Constructed Facilities*, 20(4), 375–383.
- Lalotra, B., & Singhal, D. (2017). State of the Art Report - A Comparative Study of Structural Analysis and Design Software - STAAD Pro, SAP-2000 & ETABS Software. *International Journal of Engineering and Technology*, 9(2), 1030–1043.
- Qian Kai, & Li Bing. (2015). Research Advances in Design of Structures to Resist Progressive Collapse. *Journal of Performance of Constructed Facilities*, 29(5), B4014007.
- Sadek, F., Main, J. A., Lew, H. S., Robert, S. D., Chiarito, V., & El-Tawil, S. (2011). An Experimental and Computational Study of Steel Moment Connections under a Column Removal Scenario. *Technical Note (NIST TN) - 1669 Rev2*. Retrieved from <https://www.nist.gov/publications/experimental-and-computational-study-steel-moment-connections-under-column-removal>
- Urgessa, G. S., & Esfandiari, M. (2018, April). Review of Polymer Coatings Used for Blast Strengthening of Reinforced Concrete and Masonry Structures. In *International Congress on Polymers in Concrete* (pp. 713-719). Springer, Cham.

Wang, H., Zhang, A., Li, Y., & Yan, W. (2014). A Review on Progressive Collapse of Building Structures. *The Open Civil Engineering Journal*, 8(1). Retrieved from <https://benthamopen.com/ABSTRACT/TOCIEJ-8-183>