

Supplementary Material for the Paper:

Electrochemical Iron Recovery from Biologically Produced Magnetite via Iron Oxide/Hydroxide Conversion: First Steps towards Terrestrial and Martian Applications

Reza Fayaz^{1,5,6}, Fabio La Mantia^{2,5,6}, Michael Baune^{1,6}, Antoine Carissimo^{3,5,6}, Guillaume Pillot^{3,5,6}, Md Izzuddin Jundullah Hanafi^{4,5}, Thorsten M. Gesing^{4,5}, Sven Kerzenmacher^{3,5,6} & Jorg Thöming^{1,5,6}

¹University of Bremen, Chemical Process Engineering Group (CVT), Leobener Strasse 6, 28359 Bremen, Germany

²University of Bremen, Energy Storage and Conversion Systems, Wiener Strasse 12, 28359 Bremen, Germany

³University of Bremen, Environmental Process Engineering Group (UVT), Leobener Strasse 6, 28359 Bremen, Germany

⁴University of Bremen, Institute of Inorganic Chemistry and Crystallography, Leobener Strasse 7, 28359 Bremen, Germany

⁵University of Bremen, MAPEX Center for Materials and Processes, Bibliothekstrasse 1, 28359 Bremen, Germany

⁶University of Bremen, Center for Environmental Research and Sustainable Technology (UFT), Leobener Strasse 6, 28359 Bremen, Germany

List of Figures:

- Figure S1.** The iron-reducing bacterium was *C. ferrireducens* as a terminal electron acceptor for anaerobic respiration. (a) A full magnetic response was observed after two days of iron oxide/hydroxide bio-mining. (b) Black magnetic particles from *C. ferrireducens* cultures (2 days) were observed with transmitted white light, revealing the presence of microbial cells all over the particles. 2
- Figure S2.** X-ray powder data Rietveld (XRPD) plots of iron oxide/hydroxide as the starting material, the biologically produced magnetite (bio-magnetite), and that after calcining (bio-hematite). XRPD data confirms that bio-mining has successfully converted a quantum-crystalline ferrihydrite with an average crystallite size (ACS) of 2.7(1) nm into a micro-crystalline bio-magnetite (ACS = 16.2(2) nm). Heat treatment increased the ACS further to 238(6) nm for bio-hematite. 3
- Figure S3.** The PDF EnvACS method to determine the ACS of iron oxide/hydroxide. 4
- Figure S4.** The first cycle of cyclic voltammetry test in 10 M NaOH for iron oxide/hydroxide as starting material, the biologically produced magnetite (bio-magnetite), and after heat treatment (bio-hematite) at 363 K and the obtained iron yields. No redox peaks appear as the materials are not yet electrochemically activated. 5
- Figure S5.** Visualization of the inverse relationship between specific surface area (logarithmic scale) and current efficiencies for iron oxide/hydroxide as starting material, the biologically produced magnetite, and after heat treatment (bio-hematite) after conducting 20 h chronoamperometry at -1.4 V vs. Ag/AgCl in 10 M NaOH at 363 K. The numbers in brackets are the estimated standard deviations of the obtained values in the last digit. 6
- Figure S6.** Elemental map data of a reduced bio-hematite after 20 h of electrolysis at -1.4 V vs. Ag/AgCl in 10 M NaOH at 363 K shows areas where Fe is inclusively present. Note that silver appears as a binder during pelletizing and that the presence of oxygen stains from the ambient atmosphere in the SEM chamber is unavoidable. 7
- Figure S7.** EDX analysis reveals traces of carbon in the bio-magnetite, probably from dead microorganisms or the partial formation of siderite (FeCO₃). 8

Supplementary Material for the Paper:

Electrochemical Iron Recovery from Biologically Produced Magnetite via Iron Oxide/Hydroxide Conversion: First Steps towards Terrestrial and Martian Applications

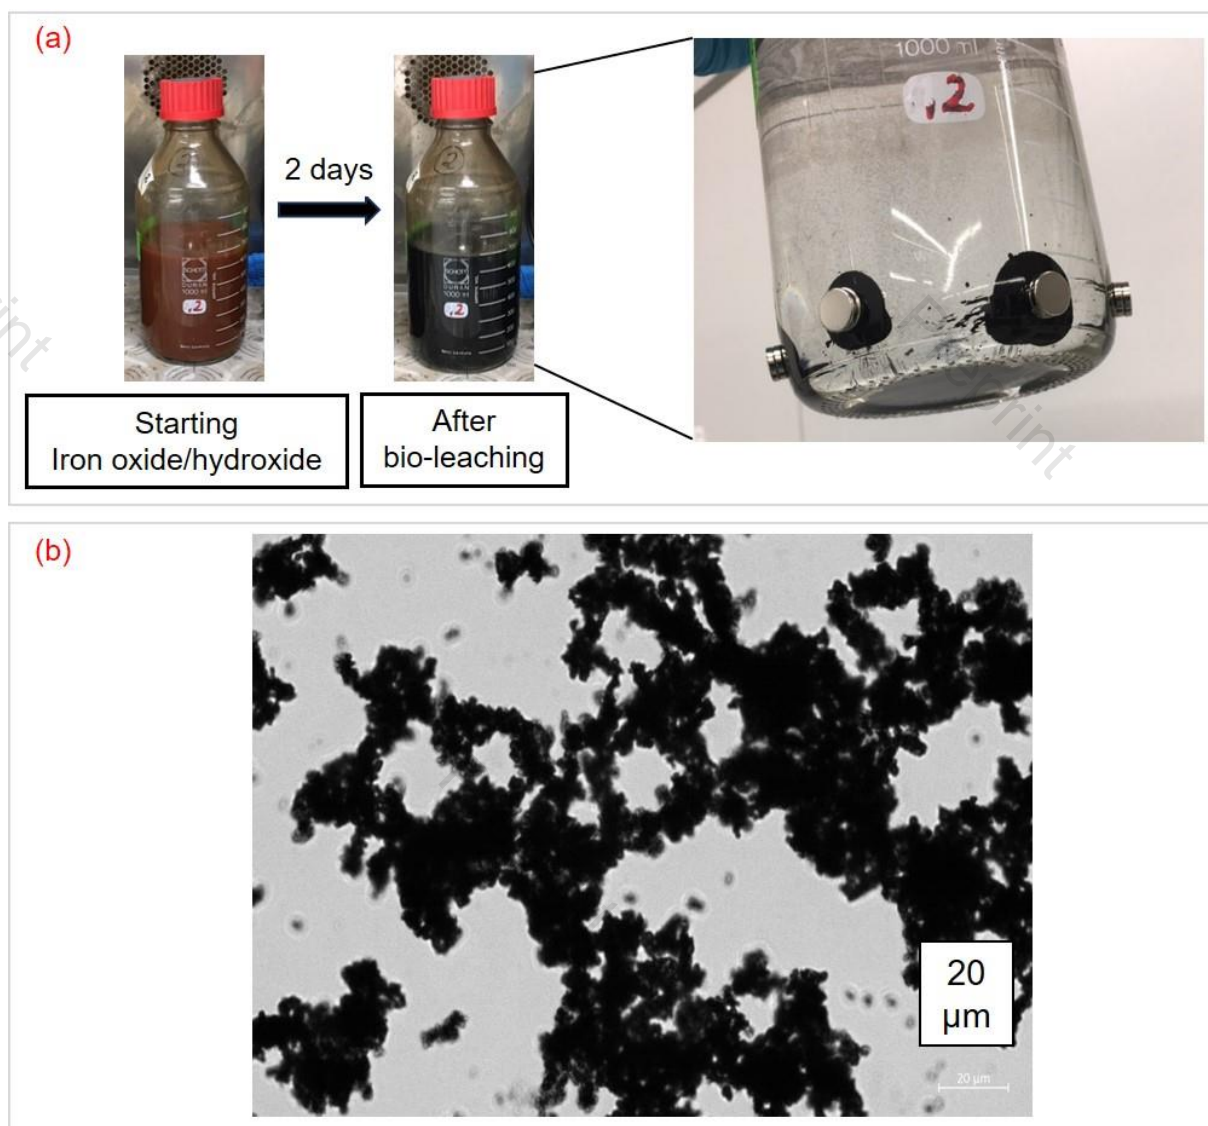


Figure S1. The iron-reducing bacterium was *C. ferrireducens* as a terminal electron acceptor for anaerobic respiration. (a) A full magnetic response was observed after two days of iron oxide/hydroxide bio-mining. (b) Black magnetic particles from *C. ferrireducens* cultures (2 days) were observed with transmitted white light, revealing the presence of microbial cells all over the particles.

Supplementary Material for the Paper:

Electrochemical Iron Recovery from Biologically Produced Magnetite via Iron Oxide/Hydroxide Conversion: First Steps towards Terrestrial and Martian Applications

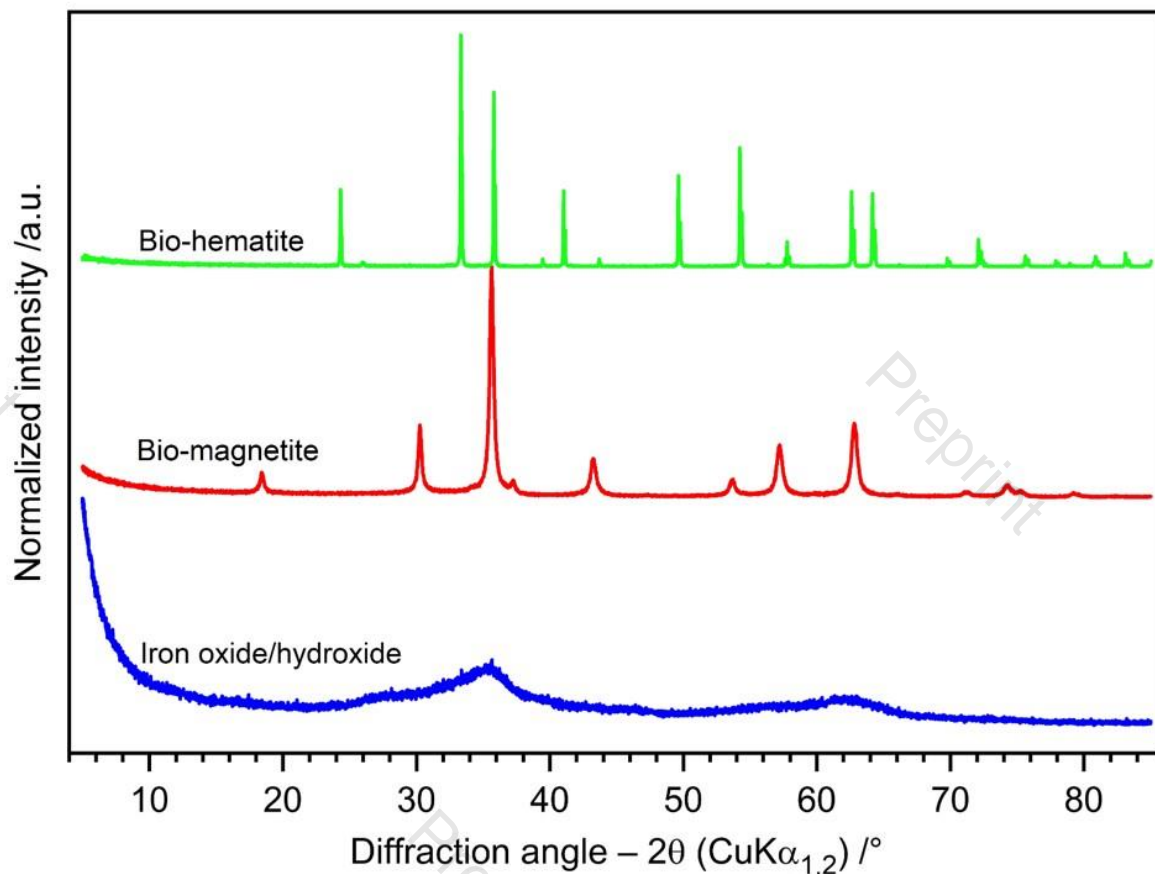


Figure S2. X-ray powder data Rietveld (XRPD) plots of iron oxide/hydroxide as the starting material, the biologically produced magnetite (bio-magnetite), and that after calcining (bio-hematite). XRPD data confirms that bio-mining has successfully converted a quantum-crystalline ferrihydrite with an average crystallite size (ACS) of 2.7(1) nm into a micro-crystalline bio-magnetite (ACS = 16.2(2) nm). Heat treatment increased the ACS further to 238(6) nm for bio-hematite.

Supplementary Material for the Paper:

Electrochemical Iron Recovery from Biologically Produced Magnetite via Iron Oxide/Hydroxide Conversion: First Steps towards Terrestrial and Martian Applications

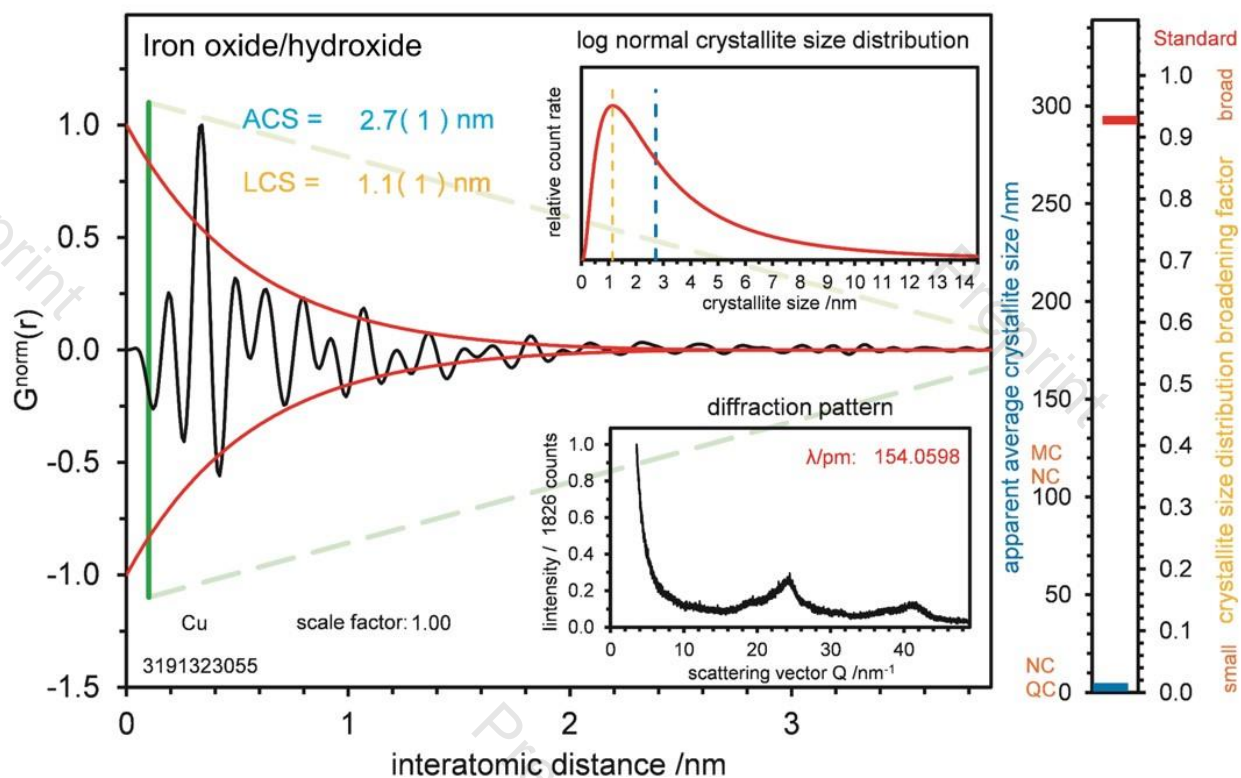


Figure S3. The PDF EnvACS method to determine the ACS of iron oxide/hydroxide.

Supplementary Material for the Paper:

Electrochemical Iron Recovery from Biologically Produced Magnetite via Iron Oxide/Hydroxide Conversion: First Steps towards Terrestrial and Martian Applications

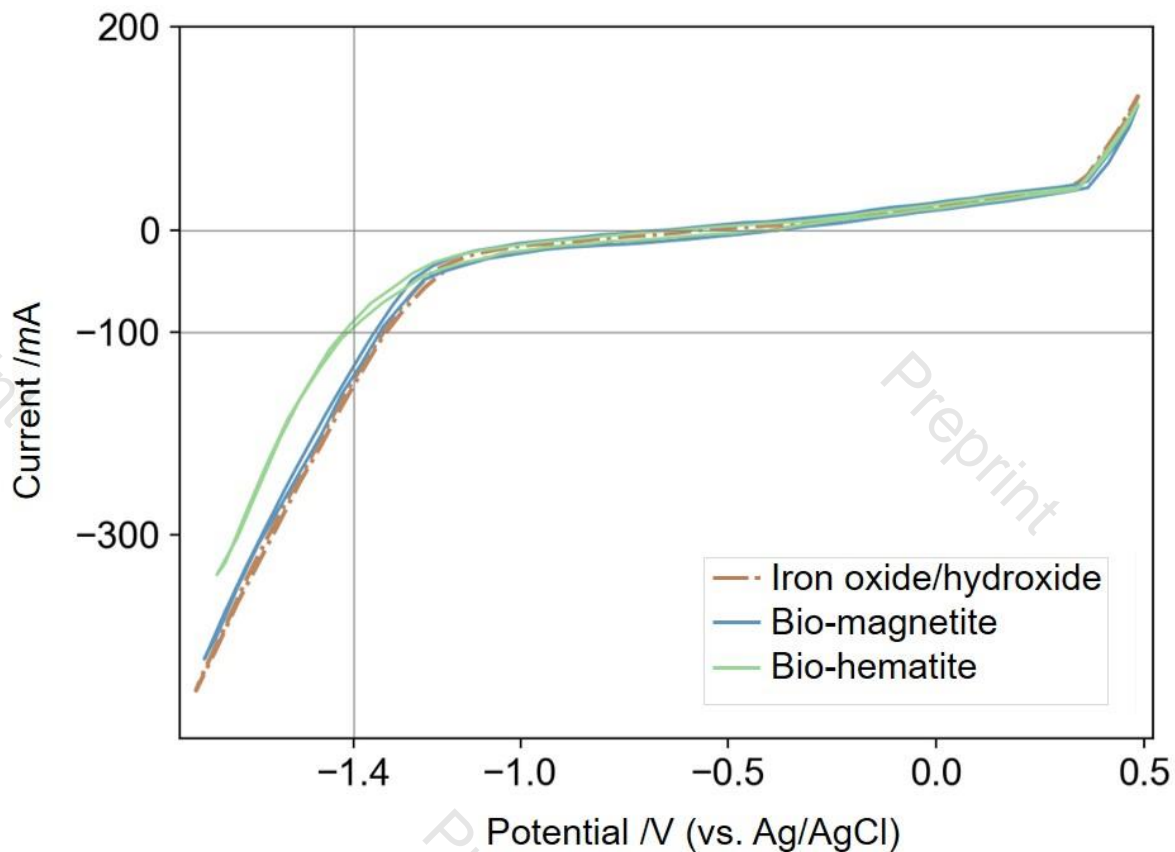


Figure S4. The first cycle of cyclic voltammetry test in 10 M NaOH for iron oxide/hydroxide as starting material, the biologically produced magnetite (bio-magnetite), and after heat treatment (bio-hematite) at 363 K and the obtained iron yields. No redox peaks appear as the materials are not yet electrochemically activated.

Supplementary Material for the Paper:

Electrochemical Iron Recovery from Biologically Produced Magnetite via Iron Oxide/Hydroxide Conversion: First Steps towards Terrestrial and Martian Applications

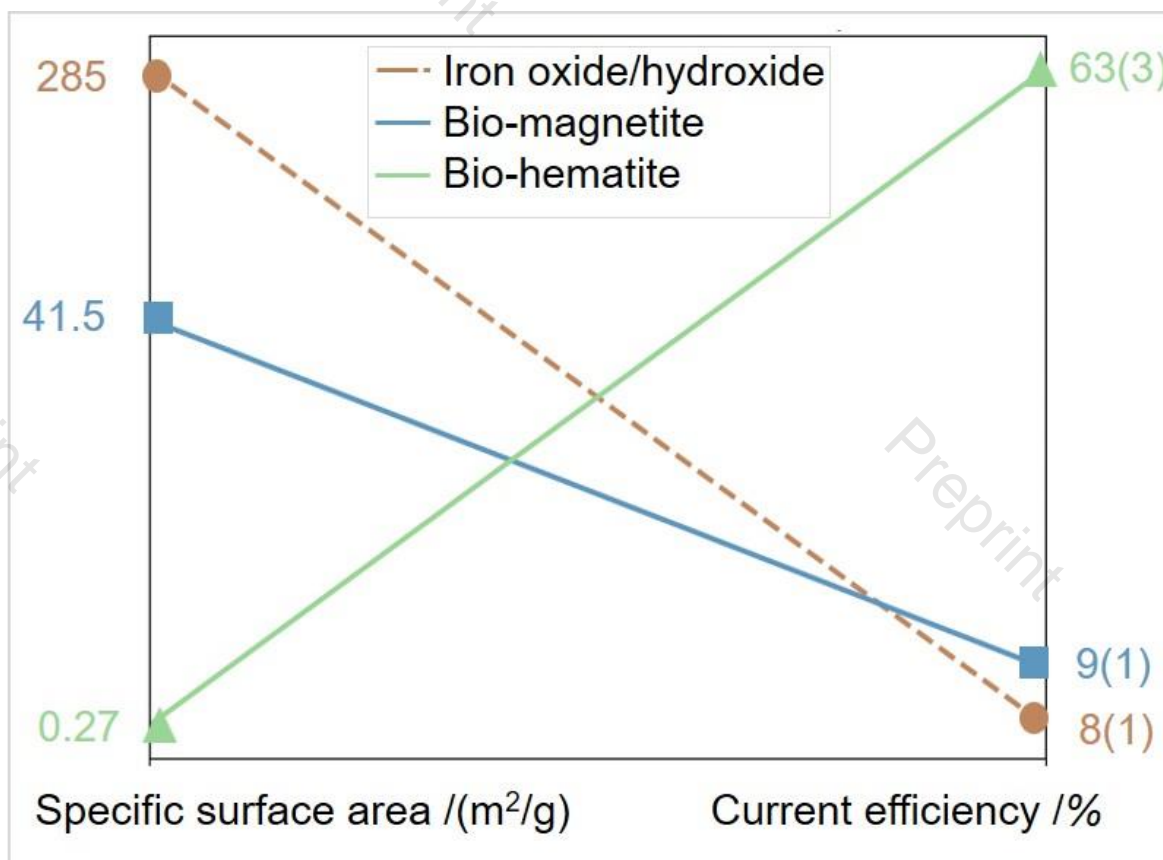


Figure S5. Visualization of the inverse relationship between specific surface area (logarithmic scale) and current efficiencies for iron oxide/hydroxide as starting material, the biologically produced magnetite, and after heat treatment (bio-hematite) after conducting 20 h chronoamperometry at -1.4 V vs. Ag/AgCl in 10 M NaOH at 363 K. The numbers in brackets are the estimated standard deviations of the obtained values in the last digit.

Supplementary Material for the Paper:

Electrochemical Iron Recovery from Biologically Produced Magnetite via Iron Oxide/Hydroxide Conversion: First Steps towards Terrestrial and Martian Applications

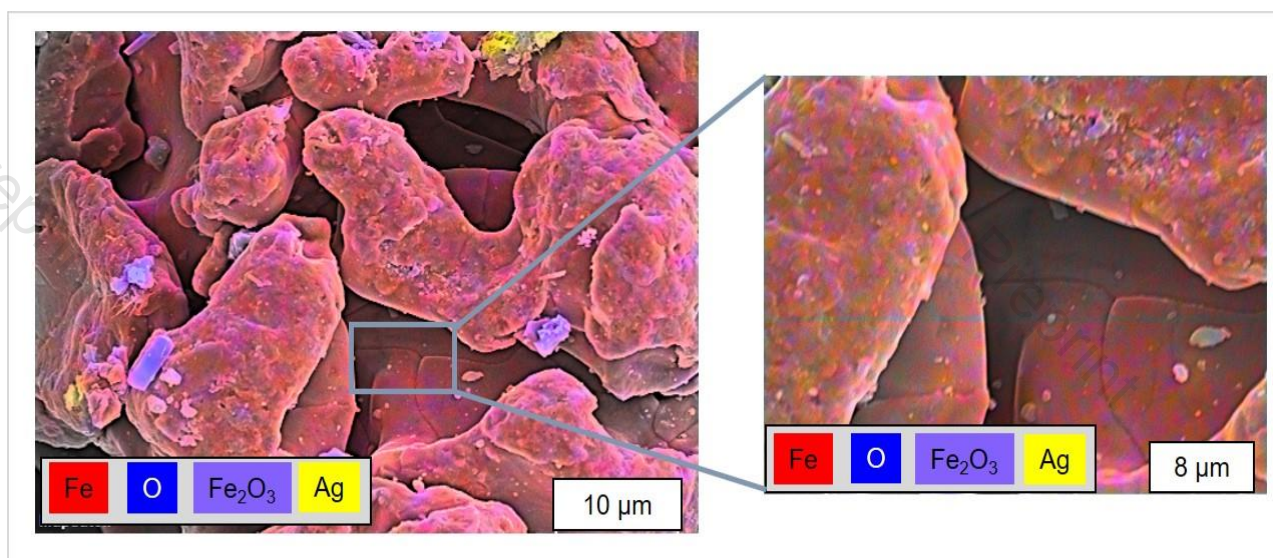


Figure S6. Elemental map data of a reduced bio-hematite after 20 h of electrolysis at -1.4 V vs. Ag/AgCl in 10 M NaOH at 363 K shows areas where Fe is inclusively present. Note that silver appears as a binder during pelletizing and that the presence of oxygen stains from the ambient atmosphere in the SEM chamber is unavoidable.

Supplementary Material for the Paper:

Electrochemical Iron Recovery from Biologically Produced Magnetite via Iron Oxide/Hydroxide Conversion: First Steps towards Terrestrial and Martian Applications

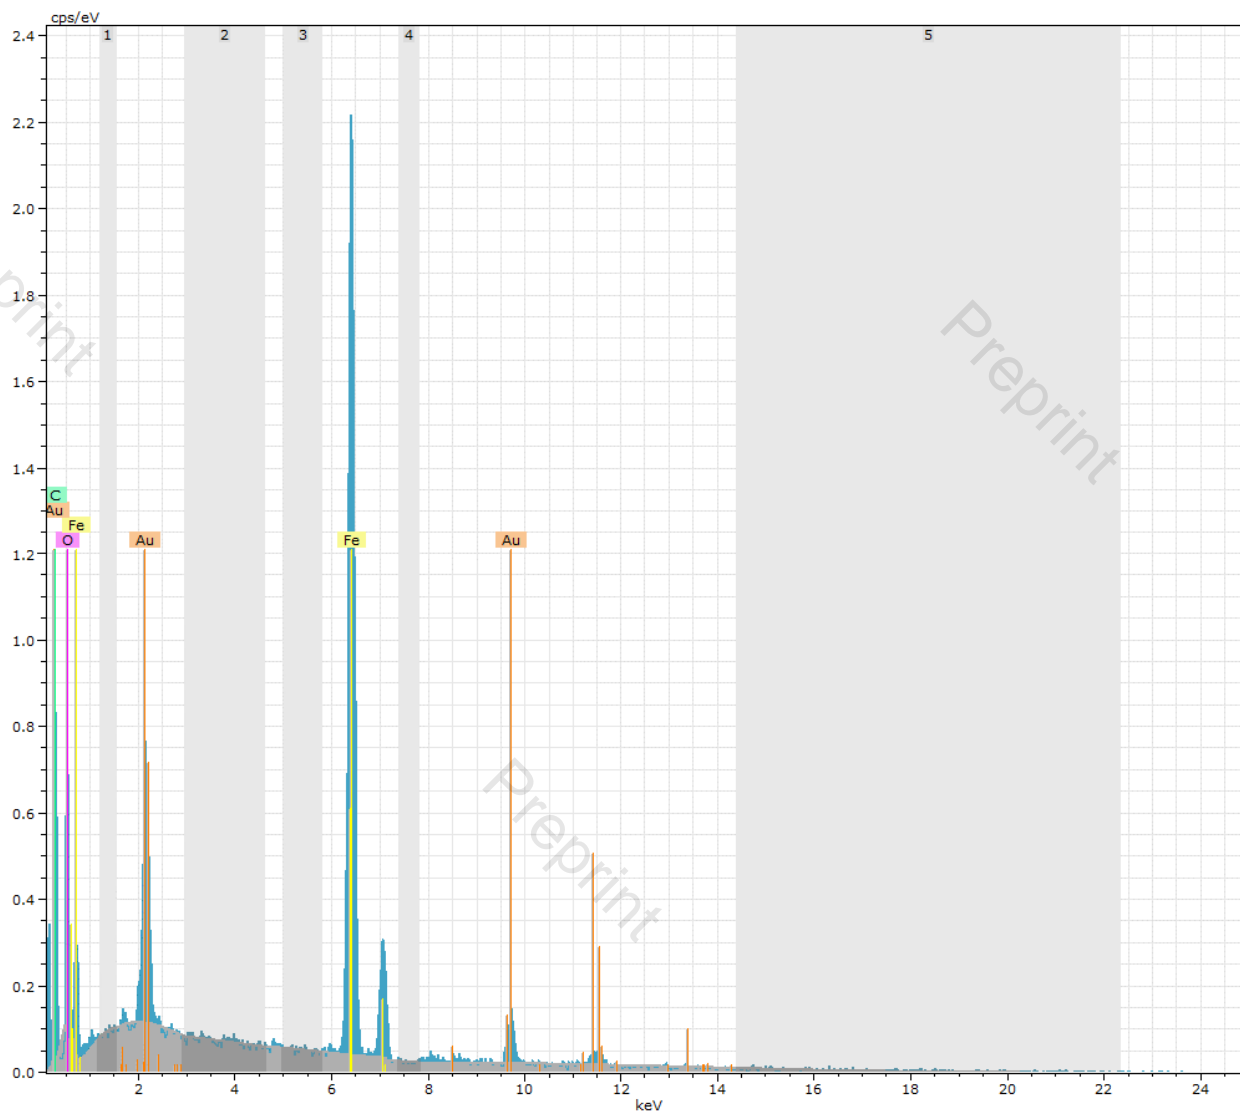


Figure S7. EDX analysis reveals traces of carbon in the bio-magnetite, probably from dead microorganisms or the partial formation of siderite (FeCO_3).